



Rev	AWO #	Description	Date	Appr
-		RELEASED	9/10/07	

APPROVED: _____ TITLE: _____
 DATE: _____

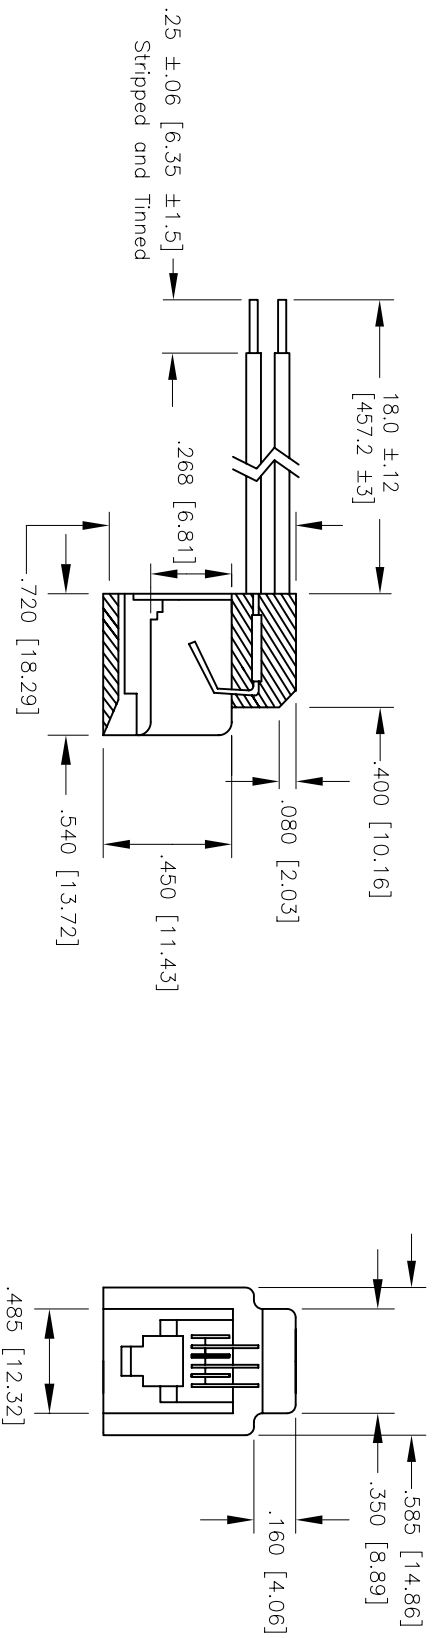

"X"	PLATING
0	15 μ" Gold
1	30 μ" Gold
2	50 μ" Gold



SPECIFICATIONS:

Material:
 Insulator: ABS, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
 Wires: 26 Awg, UL 1061, 80°C, VW-1, 300V
Plating:
 (See chart for thickness)
Electrical:
 Operating voltage: 150 VAC max
 Current rating: 1.5 Amps max
 Contact resistance: 20 mohms
 Insulation resistance: 1000 Mohms min
 Dielectric withstanding voltage: 1000 VAC for 1 minute
Temperature Rating:
 Operating temperature: -40°C to +125°C
 Environmental:
 Lead free, RoHS compliant.



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: WIRE LEADED JACK, 623 K4, BLACK
 18" LEADS, STRIPPED AND TINNED, .250"

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]		TOLERANCES: EXCEPT AS NOTED	
.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XX	± .015
.XXX	± .015	Ø.XXX	± .010
APPROVALS		DATE	
DRAWN	SS	9/10/07	
CHECKED			
APPROVED			
SIZE	PART NO.	REF.	SCALE:
X	MTJP-623-K4-X-C5-1		NTS
REV.		SHEET	1 OF 1