
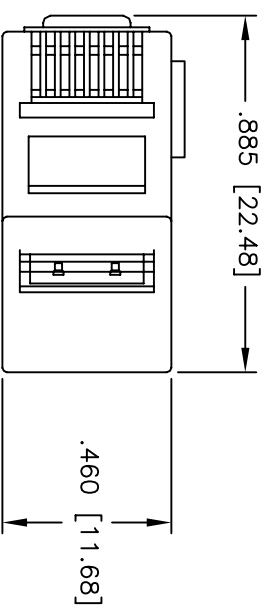


Rev	AWO #	Description	Date	Appr
-		RELEASED	1/20/06	

APPROVED: _____
 DATE: _____ TITLE: _____

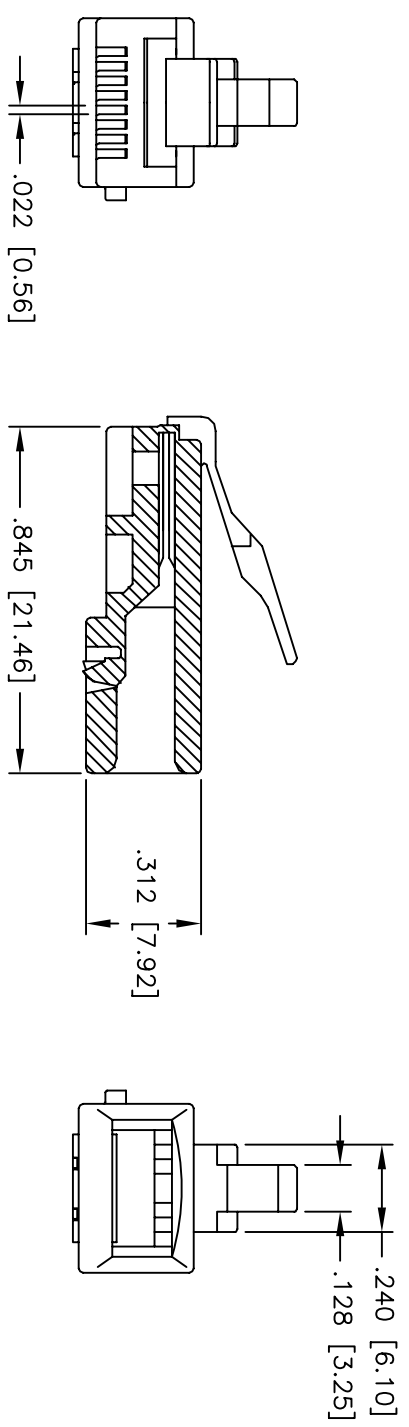

"X"	PLATING
U	15 µin Gold
W	30 µin Gold
G	50 µin Gold

SPECIFICATIONS:

Material:
 Insulator: Polycarbonate, rated UL 94V-0
 Insulator color: Clear
 Contacts: Phosphor Bronze
 Plating:
 Gold over Nickel underplate on contact area
Electrical:
 Operating voltage: 150 VAC max
 Current rating: 1.5 Amps max
 Contact resistance: 20 mohms max
 Insulation resistance: 500 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 1,000 VAC for 1 minute
Temperature Rating:
 Operating temperature: -40°C to +70°C
Environmental:
 Lead free, RoHS compliant



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE
 MODULAR TELEPHONE PLUG, 8P8C
 STANDARD OVAL WIRE TYPE, KEYED

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN SS	1/20/06
CHECKED	
APPROVED	

SIZE	PART NO.	REV.
X	MTP-88-X-K	
REF:	SCALE: NTS	SHEET 1 OF 1