

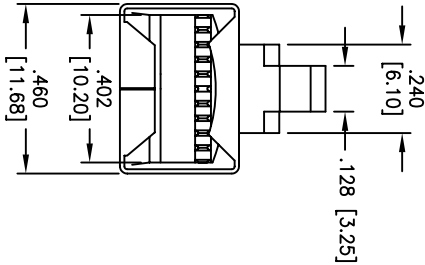
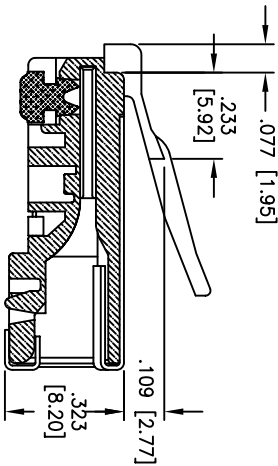



Rev	AWO #	Description	Date	Appr
-		RELEASED	1/16/09	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_



"X"	GOLD PLATING
U	15 µin
W	30 µin
G	50 µin

REPLACE "X" IN PART NUMBER WITH GOLD THICKNESS DESIGNATOR Reference.

**SPECIFICATIONS:**

- Material: Insulator: Polycarbonate, rated UL 94V-0
- Insulator color: Clear
- Contacts: Brass
- Shell: Brass
- Plating: Gold over Nickel underplate overall, See chart for thickness
- Electrical: Current rating: 2 Amps
- Insulation resistance: 100 Mohms min
- Dielectric withstanding voltage: 200 VAC Max
- Temperature Rating: Operating temperature: -40°C to +80°C
- Environmental: Lead free, RoHS compliant.

**ADAM TECH**

909 Railway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

MODULAR TELEPHONE PLUG, 10P10C  
 FOR ROUND CABLE, EMI SHIELDED

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]		TOLERANCES EXCEPT AS NOTED		INCHES		HOLE SIZES	
.X	± .10	ØXX	± .10				
.XX	± .020	ØXXX	± .015				
.XXX	± .015	ØXXX	± .010				
APPROVALS				DATE			
DRAWN	DY			1/16/09			
CHECKED							
APPROVED							
TITLE		SIZE	PART NO.	REV.			
MODULAR TELEPHONE PLUG, 10P10C FOR ROUND CABLE, EMI SHIELDED		X	MTPR-1010-X-EMI				
REF: S00104T		SCALE: NTS	SHEET 1 OF 1				