
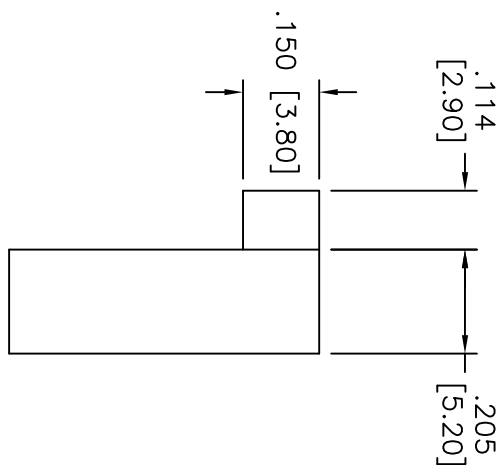
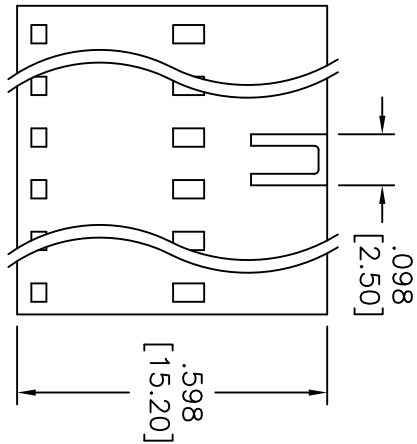


Rev	AWO #	Description	Date	Appr
-		RELEASED	3/27/09	

APPROVED: _____
 DATE: _____ TITLE: _____

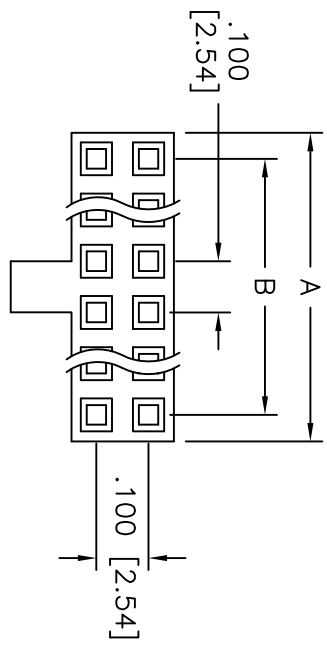

SPECIFICATIONS:
 Material: Insulator: PBT, rated UL 94V-0
 Insulator color: Black
 Electrical: Operating voltage: 250 VAC max
 Current rating: 3 Amps max.
 Insulation resistance: 1000 Mohms min
 Dielectric withstanding voltage: 1000 VAC for 1 minute
 Mechanical: Temperature Rating: Operating temperature: -25°C to +85°C
 Environmental: Lead free, RoHS compliant.
 Recommended soldering temp: 235°C for 5 sec.

Poles: 4 thru 80
 A = .100 [2.54] X No. of Positions + .008 [0.20]
 B = .100 [2.54] X No. of Spaces

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES ARE NOTED INCHES	
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

WIRE TO BOARD, FEMALE, .100 [2.54] PITCH

APPROVALS	DATE
DRAWN DY	3/27/09
CHECKED	
APPROVED	

SIZE	PART NO.	REV.
X	MTWD-XX	-

REF: S0006T SCALE: NTS SHEET 1 OF 1



6 5 4 3 2 1