

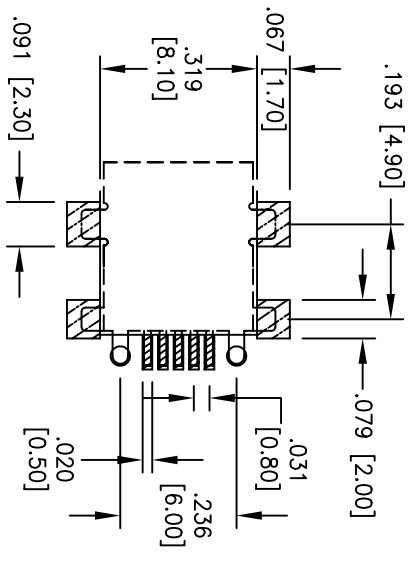
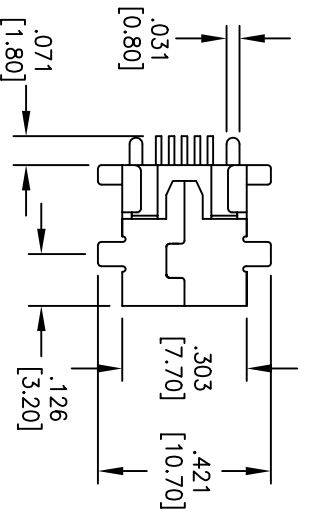


Rev	AWO #	Description	Date	Appr
-		RELEASED	12/3/04	

APPROVED: _____ TITLE: _____
 DATE: _____

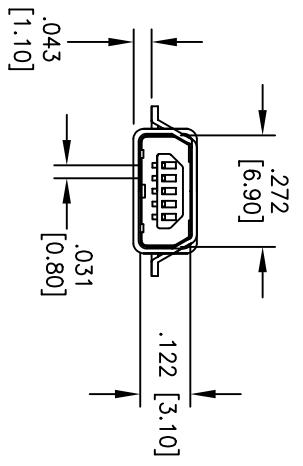

PCB LAYOUT

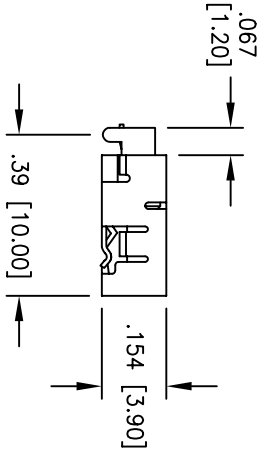

SPECIFICATIONS:

Material: Insulator: Hi-Temp Nylon PA6T, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
 Shell: Steel, Tin plated

Plating:

Gold Flash over Nickel underplate on contact area, Tin over Copper underplate on SMT tails

Electrical:

Operating voltage: 30 VAC max.
 Current rating: 1 Amp max.
 Contact resistance: 50 mohms max.
 Insulation resistance: 100 Mohms min. @ 500 VDC
 Dielectric withstanding voltage: 250 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -55°C to +105°C

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.XX ± .10	± .10
.XX ± .020	± .015
.XXX ± .015	± .010
APPROVALS	DATE
DRAWN SS	10/4/04
CHECKED	
APPROVED	

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: MINI USB, TYPE AB, SINGLE PORT
 RIGHT ANGLE, MID MOUNT, SMT

SIZE	PART NO.	REV.
X	MUSB-AB-S-RA-SMT	-
REF:	SCALE: NTS	SHEET 1 OF 1