
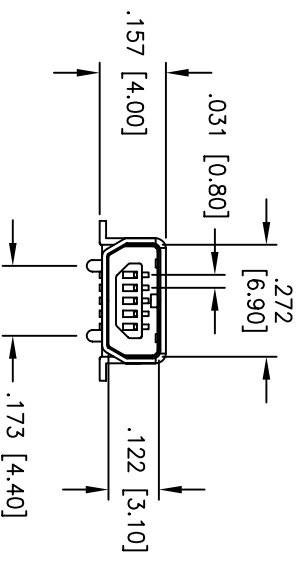
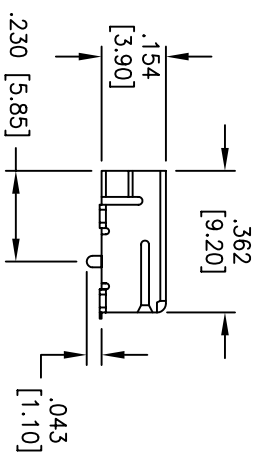
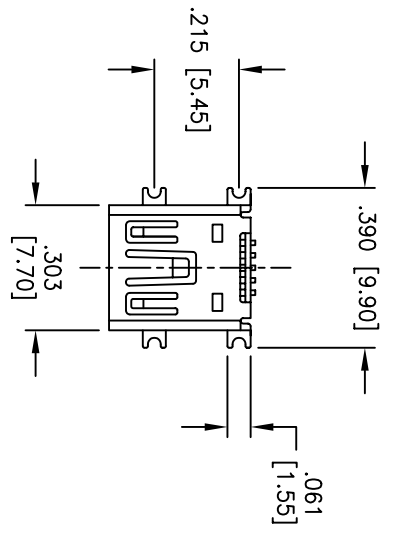


| Rev | AWO # | Description | Date | Appr |
|-----|-------|-------------|---------|------|
| - | | RELEASED | 12/3/04 | |

APPROVED: _____ TITLE: _____
 DATE: _____

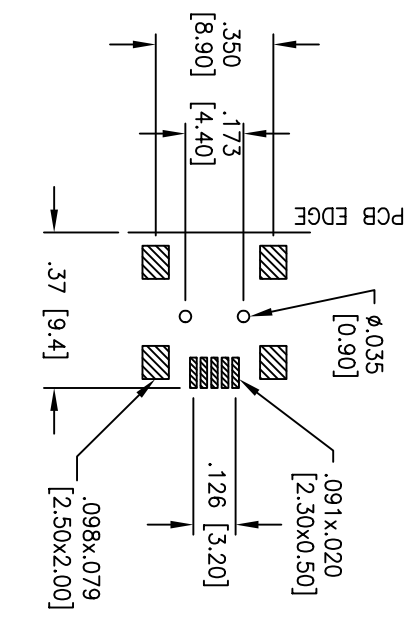

PCB LAYOUT

PACKAGED ON TAPE AND REEL

SPECIFICATIONS:

Material: Insulator: Hi-Temp Nylon PA6T, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
 Shell: Steel, Tin plated
 Plating: Gold Flash over Nickel underplate on contact area, Tin over Copper underplate on SMT tails
 Electrical: Operating voltage: 30 VAC max.
 Current rating: 1 Amp max.
 Contact resistance: 50 mohms max.
 Insulation resistance: 100 Mohms min. @ 500 VDC
 Dielectric withstanding voltage: 250 VAC for 1 minute
 Temperature Rating: Operating temperature: -55°C to +105°C

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: MINI USB, TYPE AB, SINGLE PORT
 RIGHT ANGLE, SMT, TAPE AND REEL

| | | | | | |
|--|----|------------|--|----------------------|--|
| UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [MM] TOLERANCES: EXCEPT AS NOTED | | SIZE | | PART NO. | |
| INCHES: .XX ± .10 .XX ± .020 .XXX ± .015 .XXX ± .010 | | X | | MUSB-AB1-S-RA-SMT-TR | |
| HOLES: .XX ± .10 ØXX ± .015 ØXXX ± .010 | | REV. | | REV. | |
| APPROVALS | | SCALE: NTS | | SHEET 1 OF 1 | |
| DRAWN | SS | DATE | | 10/4/04 | |
| CHECKED | | REF: | | | |
| APPROVED | | | | | |