
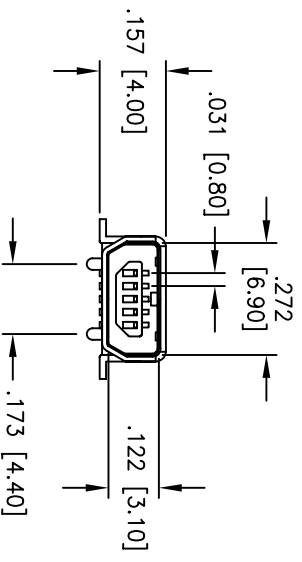
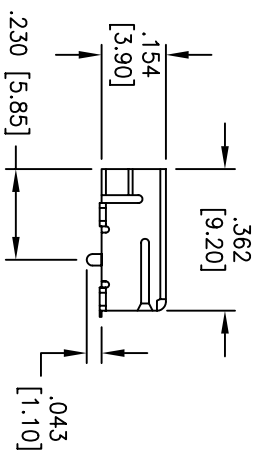
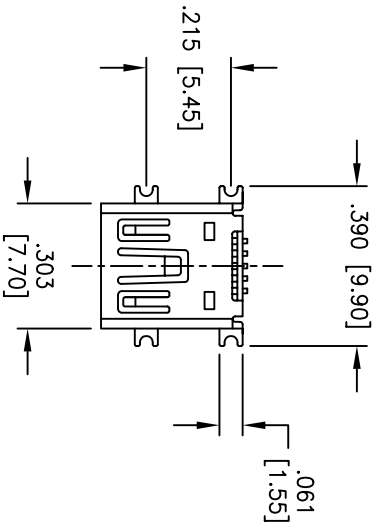


Rev	AWO #	Description	Date	Appr
-		RELEASED	12/3/04	

APPROVED: _____ TITLE: _____
 DATE: _____

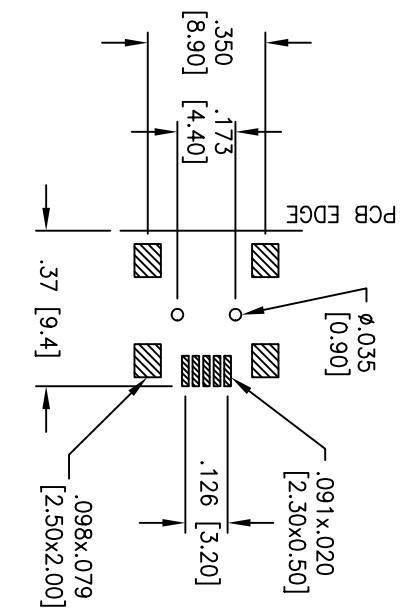

SPECIFICATIONS:
Material:
 Insulator: Hi-Temp Nylon PA6T, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
 Shell: Steel, Tin plated
 Plating:
 Gold Flash over Nickel underplate on contact area, Tin over
 Copper underplate on SMT tails
Electrical:
 Operating voltage: 30 VAC max.
 Current rating: 1 Amp max.
 Contact resistance: 50 mohms max.
 Insulation resistance: 100 Mohms min. @ 500 VDC
 Dielectric withstanding voltage: 250 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -55°C to +105°C

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES HOLES
 .XX ± .10 ØXX ± .10
 .XX ± .020 ØXX ± .015
 .XXX ± .015 ØXXX

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

DRAWN	SS	10/4/04	DATE	TITLE	MINI USB, TYPE AB, SINGLE PORT RIGHT ANGLE, SMT
CHECKED				SIZE	PART NO. MUSB-AB1-S-RA-SMT
APPROVED				REF.	SCALE: NTS SHEET 1 OF 1