
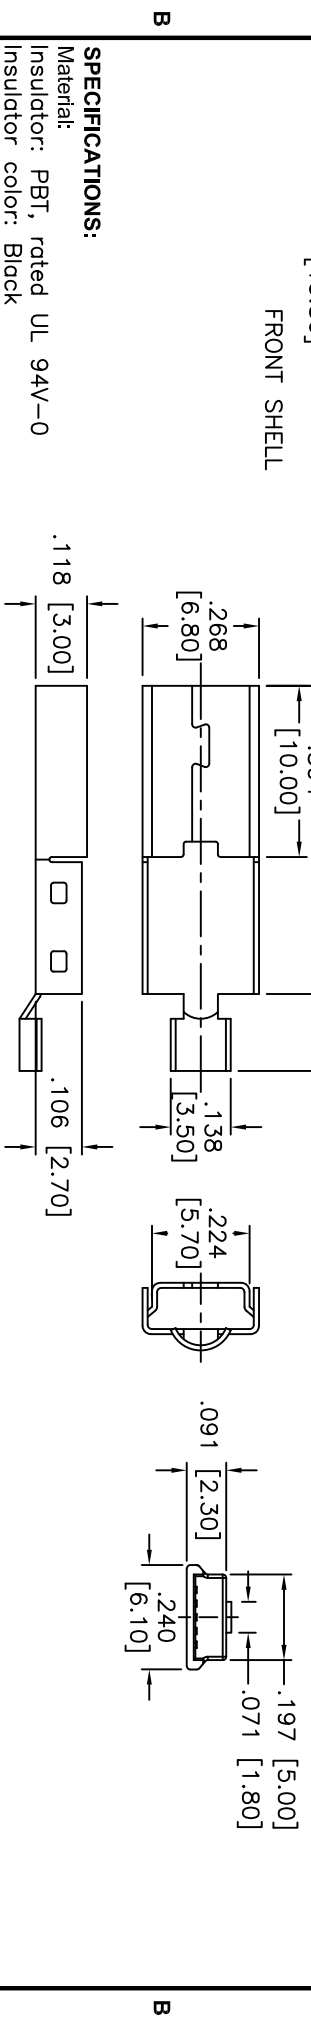


Rev	AWO #	Description	Date	Appr
-		RELEASED	7/26/10	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

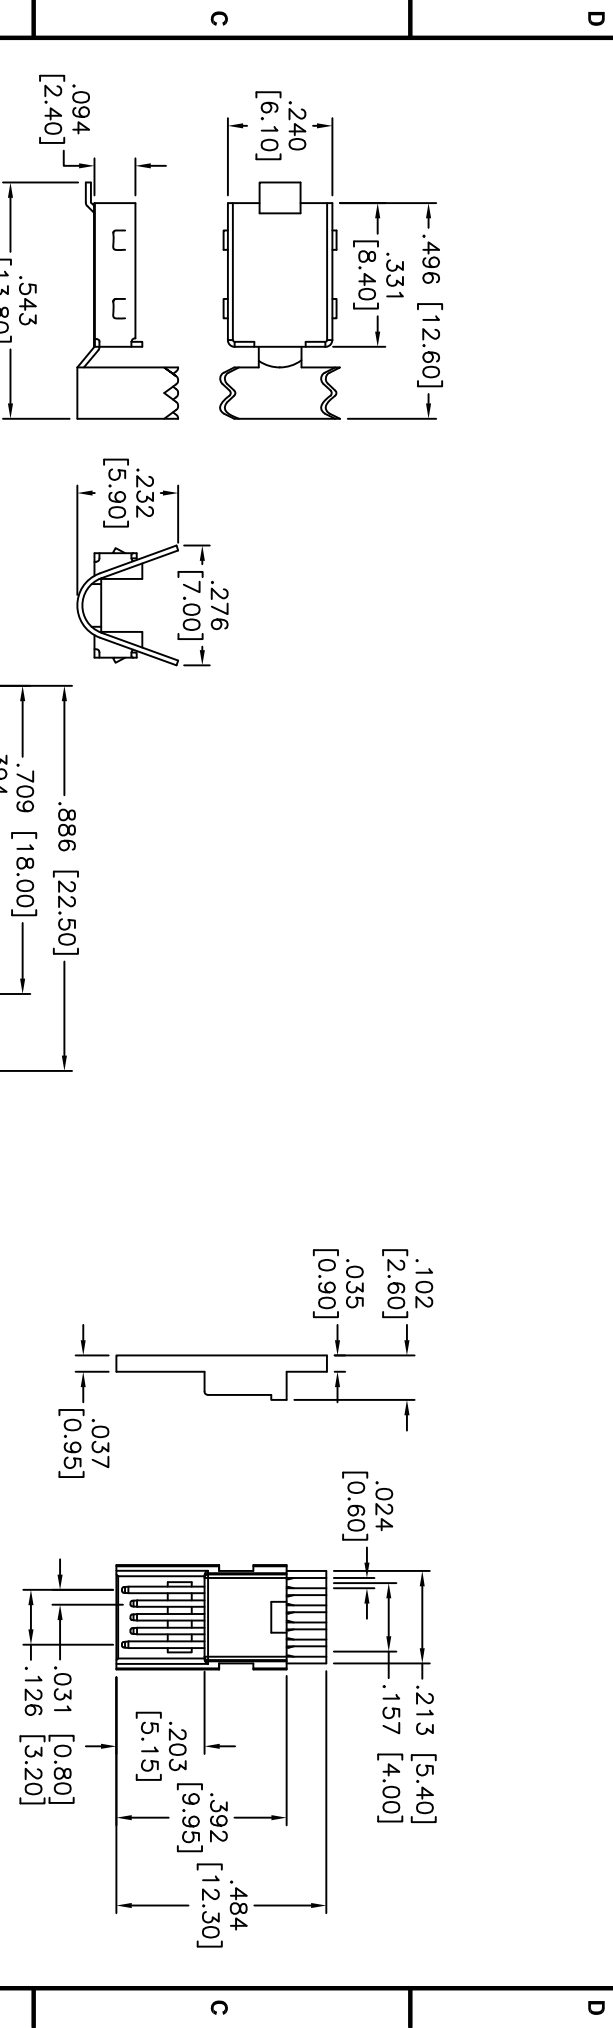

**SPECIFICATIONS:**  
 Material: Insulator: PBT, rated UL 94V-0  
 Insulator color: Black  
 Contacts: Brass  
 Shell: Cold rolled steel, Nickel plated.  
**Plating:**  
 Gold Flash over Nickel underplate on contact area,  
 Tin over Copper underplate on PCB tails

**Electrical:**  
 Current rating: 1 Amps max  
 Contact resistance: 30 Mohms max  
 Insulation resistance: 1000 Mohms min @ DC500V  
 Dielectric withstanding voltage: 500 VAC for 1 minute

**Temperature Rating:**  
 Operating temperature: -55°C to +105°C  
 Environmental:  
 Lead free, RoHS compliant.  
 Recommended soldering temp: 235°C for 5 sec.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XXX ± .015
.XXX ± .015	Ø.XXXX ± .010
APPROVALS	DATE
DRAWN	DY
CHECKED	7/26/10
APPROVED	

**ADAM TECH**  
 909 Ratway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: MINI USB, 5PIN, MALE SOLDER

SIZE	PART NO.	REV.
X	MUSB-B5-P3-S5	
REF: S00728T	SCALE: NTS	SHEET 1 OF 1