
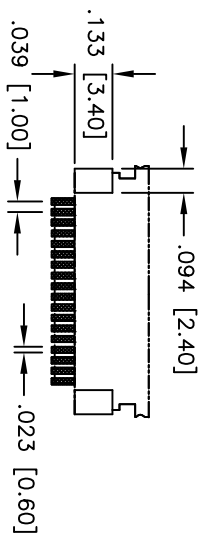
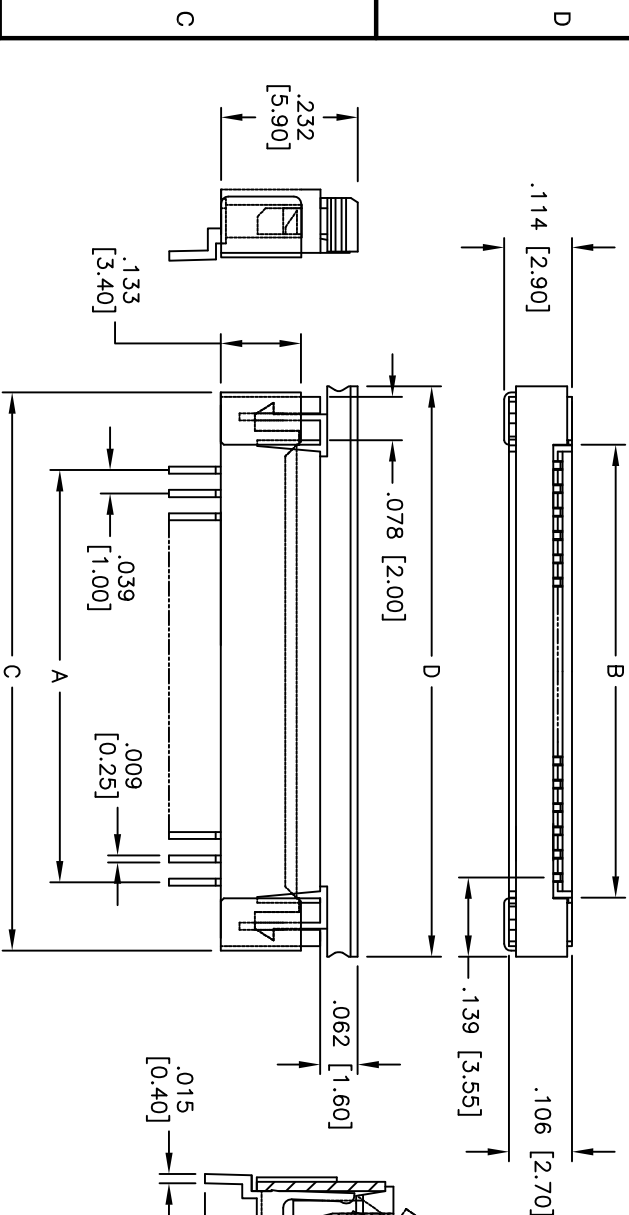
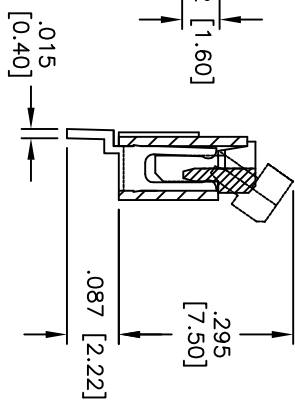
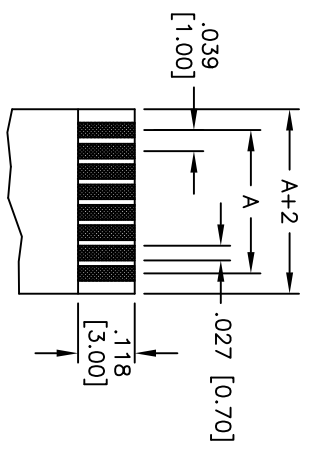


| Rev | AWO # | Description | Date | Appr |
|-----|-------|-------------|---------|------|
| - | | RELEASED | 7/22/08 | |

APPROVED: _____
 DATE: _____ TITLE: _____

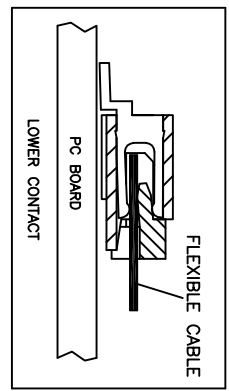

Positions: 3 thru 32
 A = .039 [1.00] x No. of Spaces
 B = A + .087 [2.20]
 C = A + .256 [6.50]
 D = A + .280 [7.10]

PACKAGED ON TAPE & REEL

SPECIFICATIONS:
 Material: Insulator: LCP, Glass reinforced, rated UL 94V-0
 Insulator color: Natural
 Contacts: Phosphor Bronze
 Plating: Tin over Copper underplate overall
 Electrical: Operating voltage: 50 VAC max
 Current rating: 0.5 Amps max
 Contact resistance: 30 mohms max initial
 Insulation resistance: 500 Mohms min
 Dielectric withstanding voltage: 500 VAC for 1 minute
 Temperature Rating: Operating temperature: -40°C to +85°C
 Environmental: Lead free, RoHS compliant
 Recommended soldering temp: 260°C for 5 seconds



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES Holes ±.10
 .XX ±.020 ØXXX ±.015
 .XXX ±.015 ØXXX ±.010

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

| | | | |
|--------------------------------|------------------|----------------------------|--------|
| DRAWN | DY | 7/22/08 | DATE |
| CHECKED | | | |
| APPROVED | | | |
| TITLE | | ZIF FLEX CIRCUIT CONNECTOR | |
| SIDE ENTRY, LOWER CONTACT, SMT | | | |
| SIZE | PART NO. | SCALE | REV. |
| X | PCA-2-XX-HL-3-TR | NIS | |
| REF: | | SHEET | 1 OF 1 |