

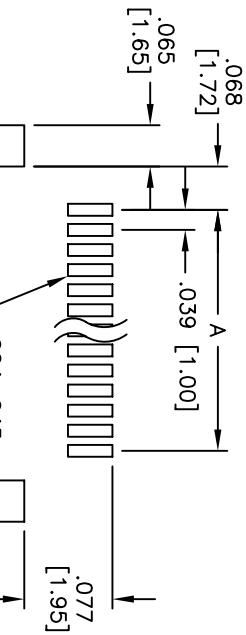


APPROVED: _____
 DATE: _____ TITLE: _____



Rev	AWO #	Description	Date	Appr
-		RELEASED	3/16/05	
A		UPDATED DRAWING	04/15/05	
B		LAYOUT UPDATE	4/25/06	

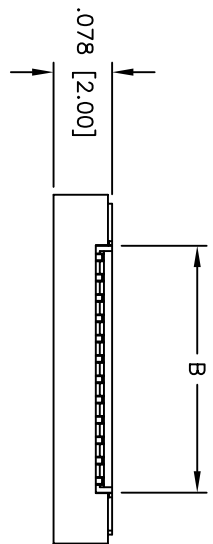

RECOMMENDED
 PCB LAYOUT
 .065X.065 [1.65X1.65]



UPPER CONTACT

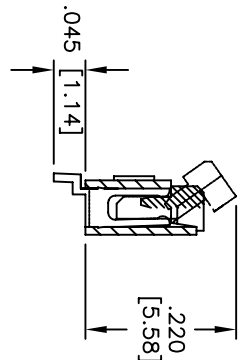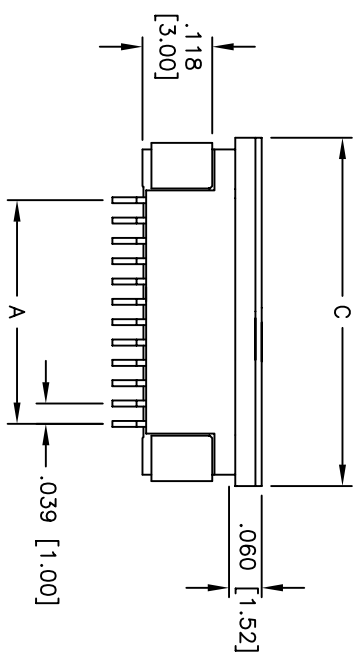

SPECIFICATIONS:
Material:
 Insulator: LCP, Glass reinforced, rated UL 94V-0
 Insulator color: Natural
 Contacts: Phosphor Bronze
Plating:
 Tin over Copper underplate overall

Positions: 3 thru 30
 A = .039 [1.00] x No. of Spaces
 B = A + .090 [2.30]
 C = A + .280 [7.10]

Electrical:
 Operating voltage: 100 VAC max
 Current rating: 0.5 Amps max
 Contact resistance: 30 mohms max initial
 Insulation resistance: 500 Mohms min
 Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating:
 Operating temperature: -40°C to +85°C
Environmental:
 Lead free, RoHS compliant
 Recommended soldering temp: 260° for 5 seconds



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLDS
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010

APPROVALS

DATE	DATE
SS	3/16/05

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

ZIF FLEX CIRCUIT CONNECTOR
SIDE ENTRY, UPPER CONTACT, SMT

DRAWN	SS	3/16/05	SIZE	PART NO.	SCALE	SHEET 1 OF 1
CHECKED			X	PCA-2-XX-HU-3	NTS	B
APPROVED						