


Rev	AWO #	Description	Date	Appr
-		RELEASED	2/10/11	

6 5 4 3 2 1

APPROVED: _____
 DATE: _____ TITLE: _____

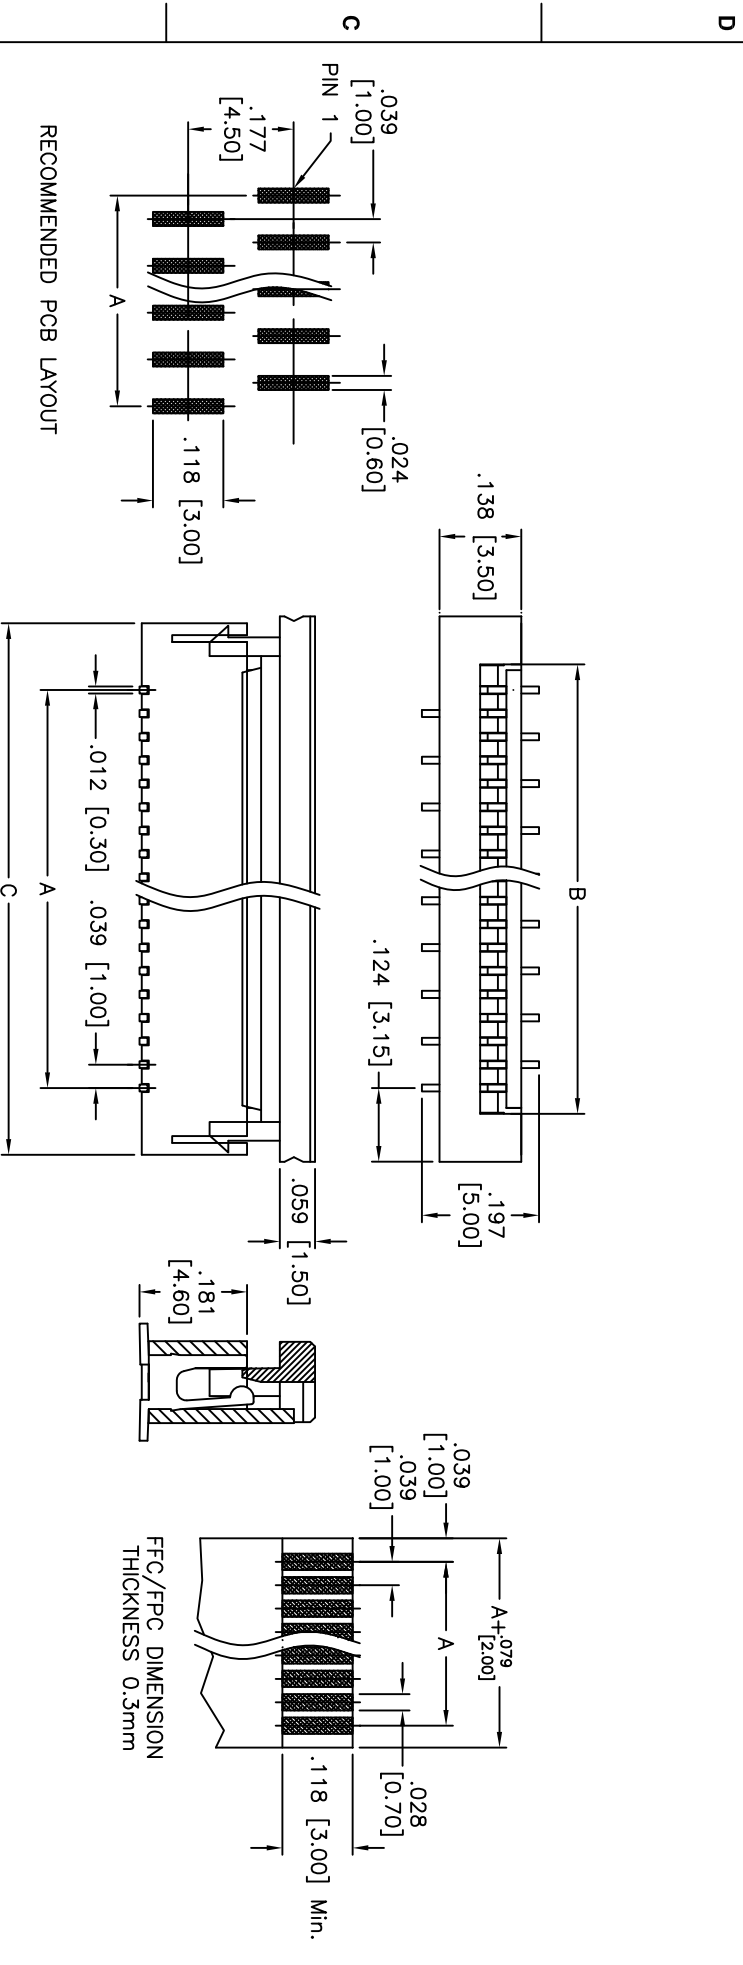

SPECIFICATIONS:
 Material:
 Housing: LCP, Glass reinforced, rated UL 94V-0
 Housing color: Natural
 Cover: LCP, Glass reinforced, rated UL 94V-0
 Terminal: Phosphor Bronze
 Plating:
 Tin over Nickel underplate overall
 Electrical:
 Operating voltage: 50 VAC max
 Current rating: 0.5 Amps max
 Contact resistance: 20 mohms max initial
 Insulation resistance: 500 Mohms min
 Dielectric withstanding voltage: 500 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -40°C to +105°C

Positions: 3 thru 30
 A = .039 [1.00] x No. of Spaces
 B = .039 [1.00] x No. of Spaces + .087 [2.20]
 C = .039 [1.00] x No. of Spaces + .236 [6.00]

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES: .10 ± .020 ØXX ± .015
 .XX ± .015
 .XXX ± .015
 .XXX ± .015
 DATE

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

ENVIRONMENTAL:
 Lead free, RoHS compliant.
 Recommended soldering temp: 260°C for 5 sec.



APPROVALS		DATE		TITLE	
DRAWN	AV		2/10/11	ZIF FLEX CIRCUIT CONNECTOR, SMT TYPE, TOP ENTRY	
CHECKED	VW		2/10/11	SIZE	PART NO.
APPROVED				X	PCA-2-XX-V-3-R
		REF:	S00030T	SCALE:	NTS
				SHEET	1 OF 1

6 5 4 3 2 1