
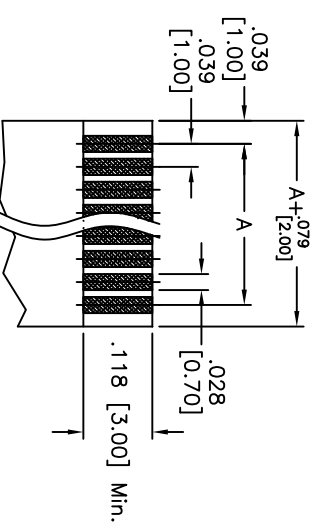
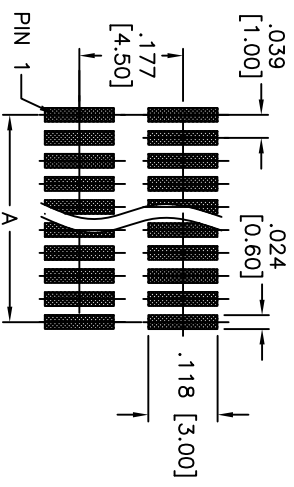

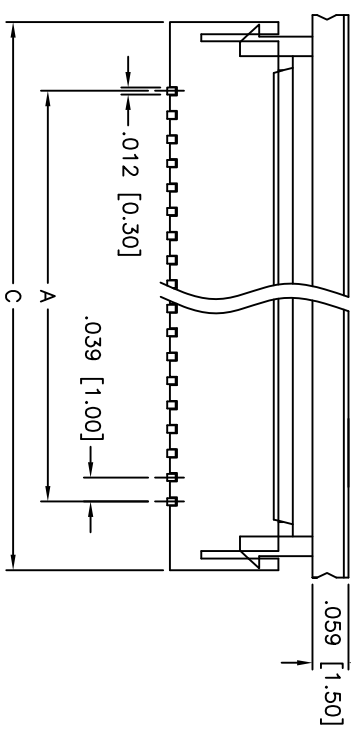


APPROVED: _____ TITLE: _____

DATE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	1/20/11	

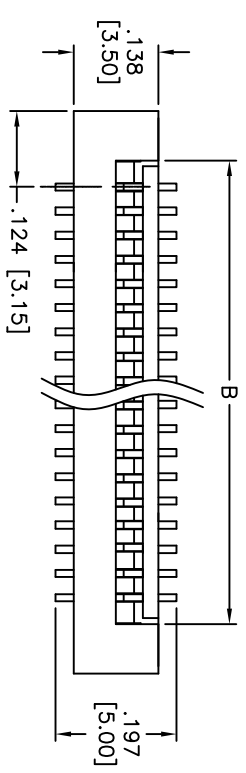

PACKAGED ON TAPE & REEL

- Positions: 6 thru 60
- A = .039 [1.00] x No. of Spaces
 - B = .039 [1.00] x No. of Spaces + .087 [2.20]
 - C = .039 [1.00] x No. of Spaces + .236 [6.00]

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: ZIF FLEX CIRCUIT CONNECTOR, SMT TYPE
 .039 [1.00] PITCH, TOP ENTRY, GOLD PLATED

UNLESS OTHERWISE SPECIFIED		APPROVALS		DATE	
ALL DIMENSIONS ARE INCHES [MM]					
TOLERANCES: EXCEPT AS NOTED					
INCHES					
X	± .10	ØX	±.10		
XX	± .020	ØXX	±.015		
XXX	± .015	ØXXX	±.010		
DRAWN		AV	1/20/11		
CHECKED		JL	1/20/11		
APPROVED					
SIZE	PART NO.	SCALE:	SHEET	REV.	
X	PCA-2A-XX-V-3-G-TR	NIS	1 OF 1	-	
REF:	S00030T				



SPECIFICATIONS:
 Material: _____
 Housing: LCP, Glass reinforced, rated UL 94V-0
 Housing color: Natural
 Cover: LCP, Glass reinforced, rated UL 94V-0
 Terminal: Phosphor Bronze
 Plating: _____
 Gold flash over Nickel underplate overall
 Electrical:
 Operating voltage: 50 VAC max
 Current rating: 0.5 Amps max
 Contact resistance: 20 mohms max initial
 Insulation resistance: 500 Mohms min
 Dielectric withstanding voltage: 500 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -40°C to +105°C
 Environmental:
 Lead free, RoHS compliant.
 Recommended soldering temp: 260°C for 5 sec.