
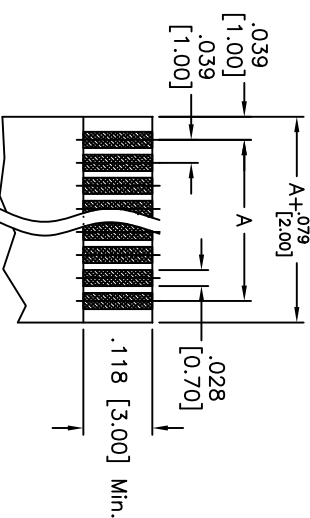
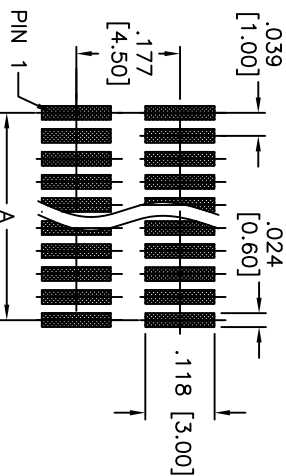

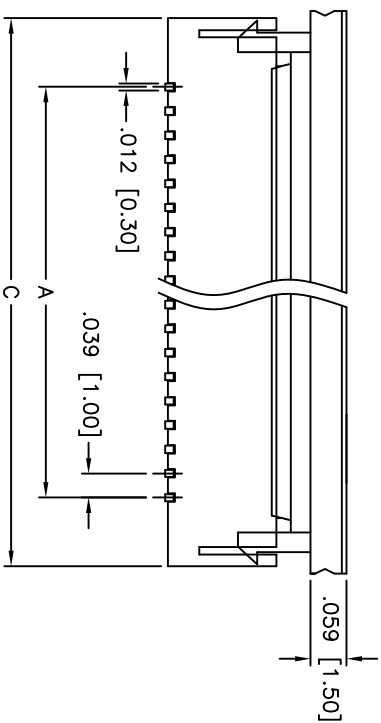


APPROVED: \_\_\_\_\_ TITLE: \_\_\_\_\_

DATE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	2/22/11	

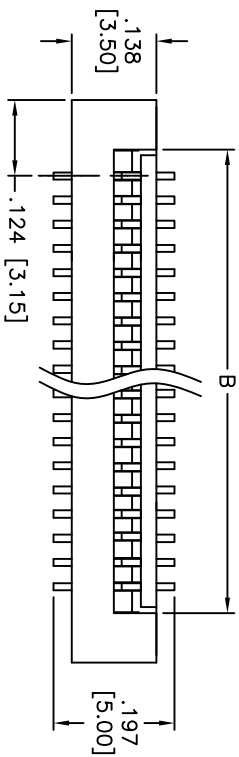

FPC/FPC DIMENSION THICKNESS 0.3mm

**PACKAGED ON TAPE & REEL**

Positions: 6 thru 60

- A = .039 [1.00] x No. of Spaces
- B = .039 [1.00] x No. of Spaces + .087 [2.20]
- C = .039 [1.00] x No. of Spaces + .236 [6.00]

**SPECIFICATIONS:**

Material:

Housing: LCP, Glass reinforced, rated UL 94V-0

Housing color: Natural

Cover: LCP, Glass reinforced, rated UL 94V-0

Terminal: Phosphor Bronze

Plating:

Tin over Nickel underplate overall

Electrical:

Operating voltage: 50 VAC max

Current rating: 0.5 Amps max

Contact resistance: 20 mohms max initial

Insulation resistance: 500 Mohms min

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

Operating temperature: -40°C to +105°C

Environmental:

Lead free, RoHS compliant.

Recommended soldering temp: 260°C for 5 sec.



**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: ZIF FLEX CIRCUIT CONNECTOR, SMT TYPE  
PART NO.: PCA-2A-06-V-3-1/R  
SIZE: X  
REF: S00030T

UNLESS OTHERWISE SPECIFIED		APPROVALS		DATE	
ALL DIMENSIONS ARE INCHES [MM]					
TOLERANCES: EXCEPT AS NOTED					
X	± .10	ØXX	± .10		
XX	± .020	ØXXX	± .015		
XXX	± .015	ØXXX	± .010		
DRAWN	AV	2/22/11			
CHECKED	VW	2/22/11			
APPROVED					

6

5

4

3

2

1