
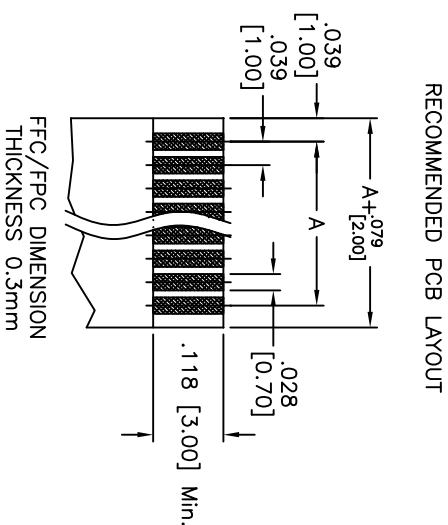
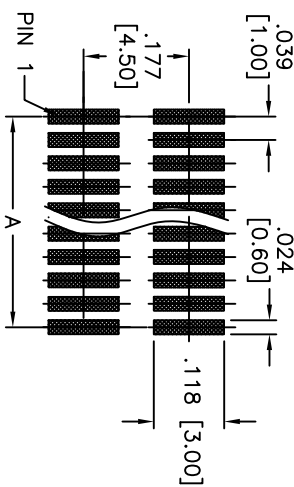

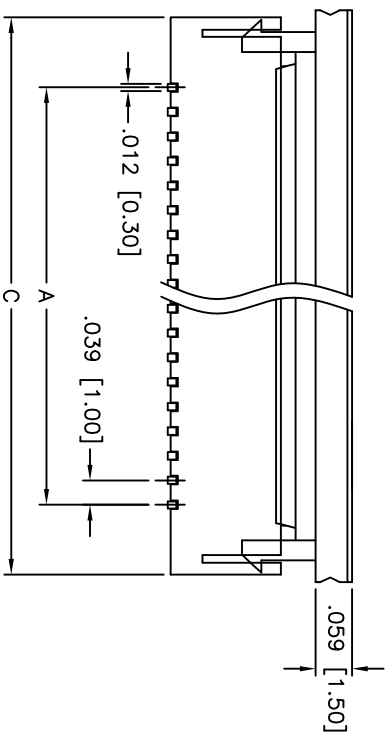


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	12/05/07	
A		REDRAWN	12/21/10	

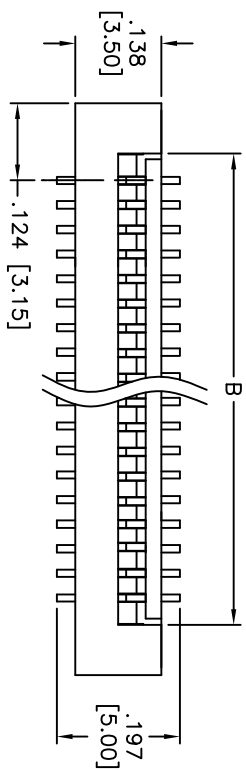

Positions: 6 thru 60
 A = .039 [1.00] x No. of Spaces
 B = .039 [1.00] x No. of Spaces + .087 [2.20]
 C = .039 [1.00] x No. of Spaces + .236 [6.00]

SPECIFICATIONS:

Material:
 Housing: LCP, Glass reinforced, rated UL 94V-0
 Housing color: Natural
 Cover: LCP, Glass reinforced, rated UL 94V-0
 Terminal: Phosphor Bronze
Plating:
 Tin over Nickel underplate overall
Electrical:
 Operating voltage: 50 VAC max
 Current rating: 0.5 Amps max
 Contact resistance: 20 mohms max initial
 Insulation resistance: 500 Mohms min
 Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating:
 Operating temperature: -40°C to +105°C
 Environmental:
 Lead free, RoHS compliant.
 Recommended soldering temp: 260°C for 5 sec.

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: ZIF FLEX CIRCUIT CONNECTOR, SMT TYPE
 .039 [1.00] PITCH, TOP ENTRY

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED	
X	± .10
.XX	± .020
.XXX	± .015
∅XX	± .015
∅XXX	± .010
APPROVALS	DATE
DRAWN	SHIREN
CHECKED	
APPROVED	

SIZE	PART NO.	SCALE:	SHEET	REV.
X	PCA-2A-XX-V-3	NTS	1 OF 1	A

