
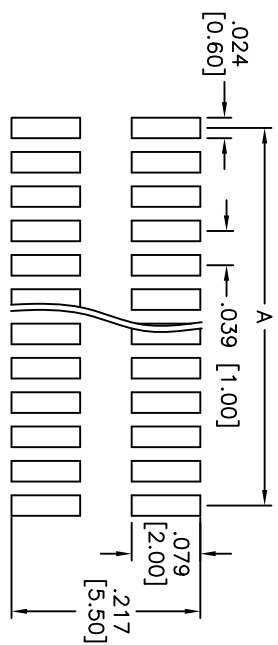

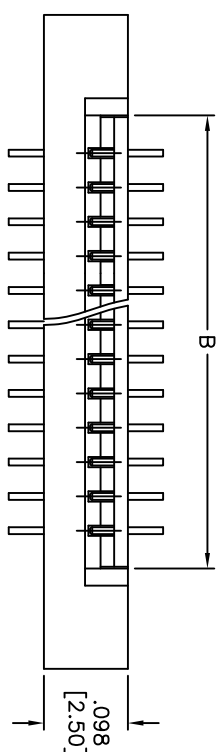


APPROVED: _____

DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	1/20/11	

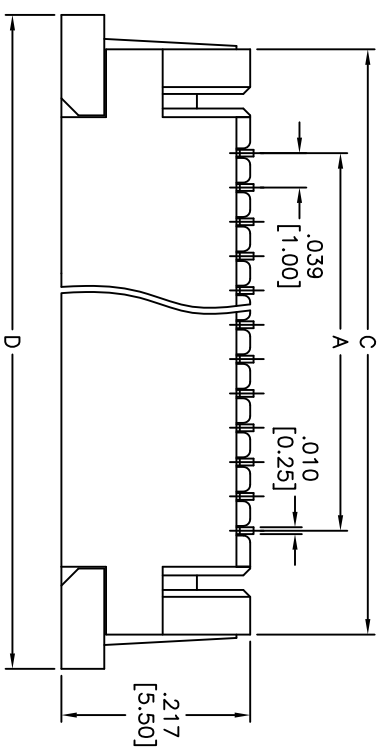

RECOMMENDED PCB LAYOUT
PACKAGED ON TAPE & REEL

Positions: 6 thru 30
 A = .039 [1.00] x No. of Spaces
 B = A + .079 [2.00]
 C = A + .236 [6.00]
 D = A + .315 [8.00]

SPECIFICATIONS:

Material: Thermoplastic, rated UL 94V-0

Housing color: Natural

Slider: Thermoplastic, rated UL 94V-0

Terminal: Phosphor Bronze

Plating:

Matte Tin over Nickel underplate overall

Electrical:

Voltage rating: 50V AC/DC

Current rating: 0.5A AC/DC

Contact resistance: 20 Mohms max initial

Insulation resistance: 800 Mohms min

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

Temperature range: -25°C to +85°C

Environmental:

Lead free, RoHS compliant.

Recommended soldering temp: 260°C for 5 sec.



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: ZIF FLEX CIRCUIT CONNECTOR, 1.00MM PITCH
 TOP ENTRY, SMT TYPE, MATTE TIN PLATED

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		INCHES		HOLES	
X	± .10	ØX	± .10	ØXXX	± .015
XX	± .020	ØXXX	± .015	XXXX	± .010
XXX	± .015	ØXXX	± .010		
APPROVALS		DATE			
DRAWN	AY	1/20/11			
CHECKED	JL	1/20/11			
APPROVED					
SIZE	PART NO.	REV.			
X	PCA-2C-XX-V-3-MT-1/R	-			
REF:	S0067T	SCALE:	NIS	SHEET	1 OF 1