
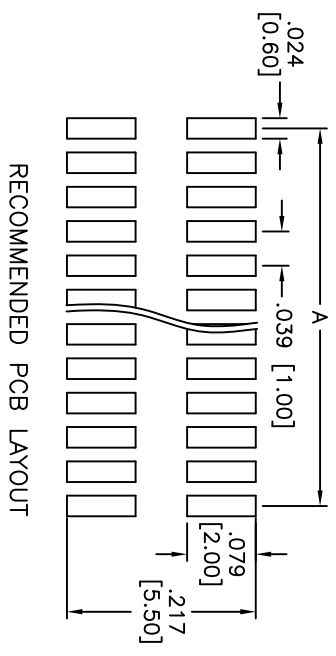
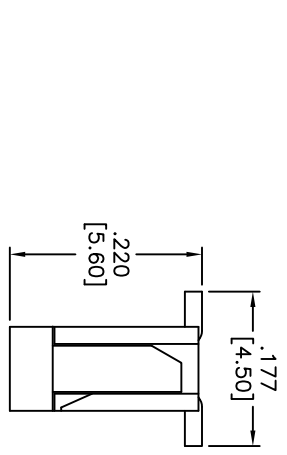
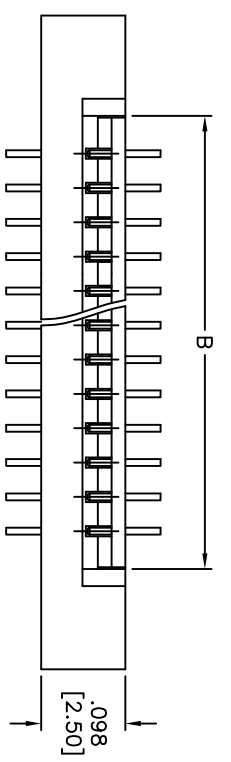


APPROVED: _____
 DATE: _____ TITLE: _____

Rev	AWO #	Description	Date	Appr
-		RELEASED	8/26/10	

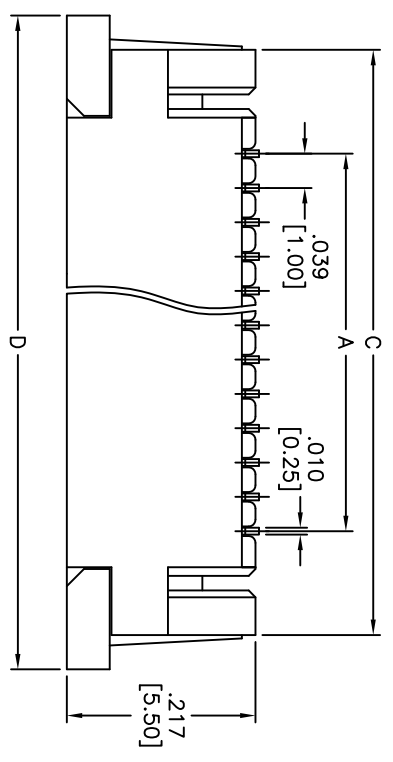

Positions: 6 thru 30
 A = .039 [1.00] x No. of Spaces
 B = A + .079 [2.00]
 C = A + .236 [6.00]
 D = A + .315 [8.00]

SPECIFICATIONS:
 Material: Thermoplastic, rated UL 94V-0
 Housing color: Natural
 Slider: Thermoplastic, rated UL 94V-0
 Terminal: Phosphor Bronze
 Plating: Tin over Nickel underplate overall
 Electrical:
 Voltage rating: 50V AC/DC
 Current rating: 0.5A AC/DC
 Contact resistance: 20 mohms max initial
 Insulation resistance: 800 Mohms min
 Dielectric withstanding voltage: 500 VAC for 1 minute
 Temperature Rating:
 Temperature range: -25°C to +85°C
 Environmental:
 Lead free, RoHS compliant.
 Recommended soldering temp: 260°C for 5 sec.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		TITLE ZIF FLEX CIRCUIT CONNECTOR, 1.00MM PITCH TOP ENTRY, SMT TYPE	
INCHES	± .10	ØXX	± .015
.XX	± .020	ØXXX	± .010
.XXX	± .015	ØXXXX	± .010
APPROVALS		DATE	
DRAWN	DY	8/26/10	
CHECKED			
APPROVED			
SIZE	PART NO.	SCALE:	REV.
X	PCA-2C-XX-V-3	NTS	-
REF:	S00167T	SHEET	1 OF 1

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710