Rev	AWO #	Description	Date	Appr
-		RELEASED	10/20/10	

APPROVED: _____

DATE: _____ TITLE: _____

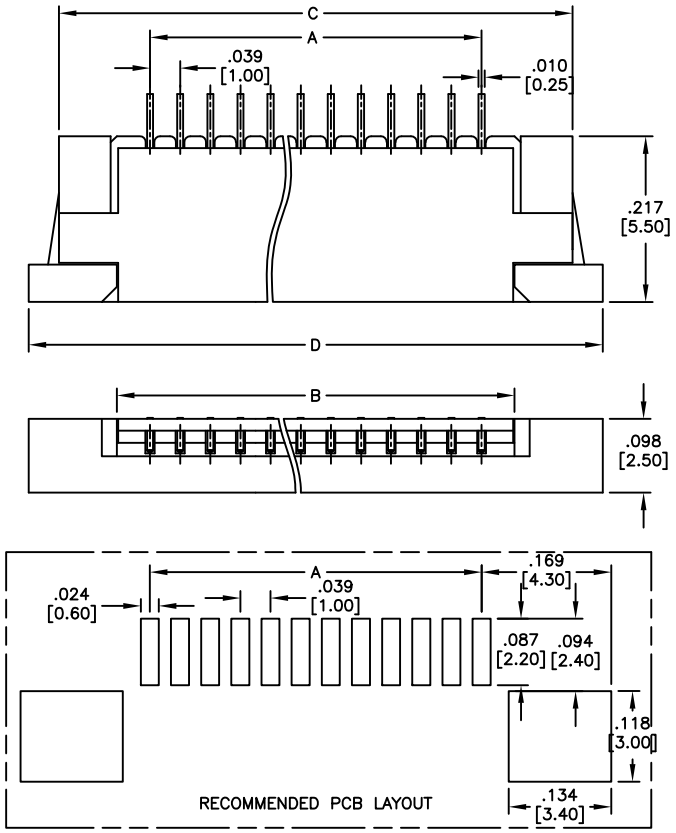

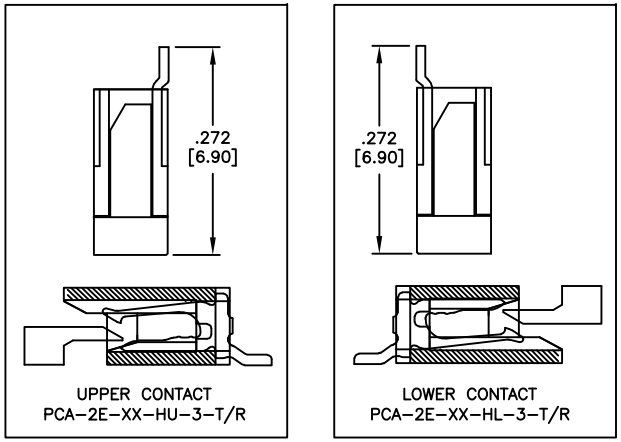

PACKAGED ON TAPE & REEL

Postitions: 4 thru 30

A = .100 [2.54] x No. of (Postions-1)

B = A + .083 [2.10]

C = A + .240 [6.10]

D = A + .315 [8.00]

SPECIFICATIONS:

Material:

Insulator: Hi-temp thermoplastic, rated UL 94V-0

Contact: Phosphor Brzone

Plating:

Tin over Copper underplate overall.

Electrical:

Operating voltage: 50V AC/DC

Current rating: 0.5A AC/DC

Contact resistance: 20 mohms Max.

Insulation resistance: 800 mohms Min.

Withstand Voltage: 500V AC/minute

Temperature Rating:

Operating temperature: -25°C to +85°C

Environmetal:

Lead free, RoHS compliant.

Recommended soldering temp: 260°C for 5 sec.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	DY	10/20/10
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: ZIF FLEX CIRCUIT CONNECTOR
SIDE ENTRY, SMT TYPE

SIZE	PART NO.	REV.
X	PCA-2E-XX-HX-3-T/R	-

REF: S00167T | SCALE: NTS | SHEET 1 OF 1