


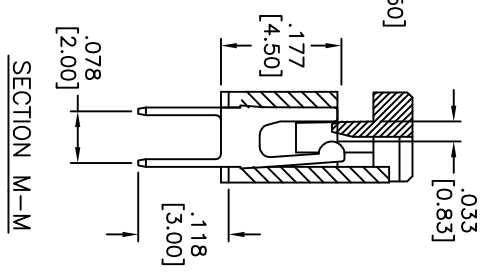
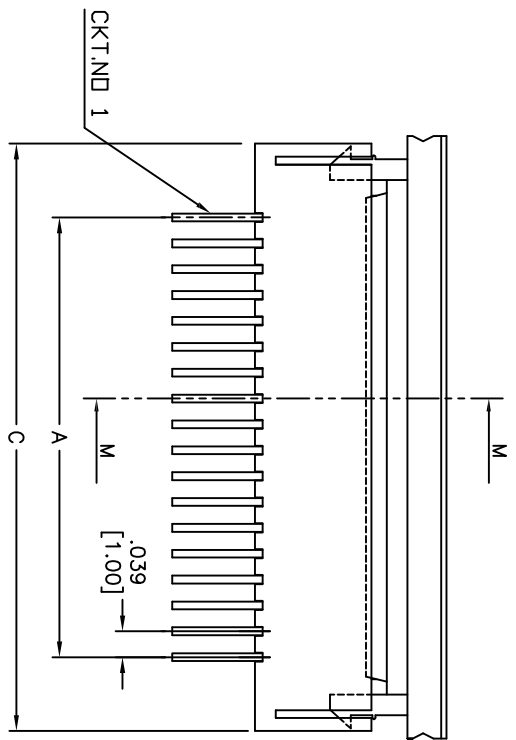


Rev	AWO #	Description	Date	Appr
-		RELEASED	10/07/09	

APPROVED: _____
 DATE: _____ TITLE: _____

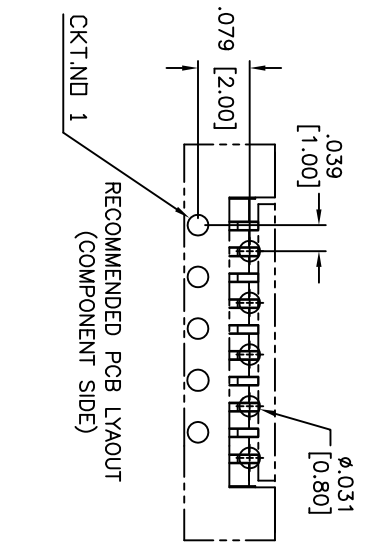

FPC/FPC DIMENSION
 THICKNESS 0.3±0.05mm
 TOLERANCE:0.05mm

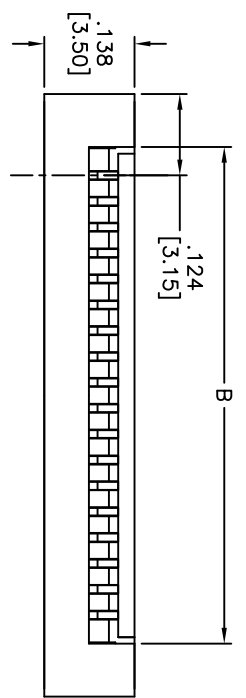

SPECIFICATIONS:
 Material:
 Housing: LCP, rated UL 94V-0
 Housing color: Natural
 Terminal: Phosphor Bronze
 Plating:
 Tin over Copper underplate overall
 Electrical:
 Operating voltage: 50 VAC max
 Current rating: 0.5 Amps max
 Contact resistance: 30 mohms max initial
 Insulation resistance: 500 Mohms min
 Dielectric withstanding voltage: 500 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -40°C to +85°C
 Environmental:
 Lead free, RoHS compliant.
 Recommended soldering temp: 235°C for 5 sec.

Positions: 3 thru 30
 A = .039 [1.00] x No. of Spaces
 B = A + .087 [2.20]
 C = A + .236 [6.00]



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: ZIF FLEX CIRCUIT CONNECTOR
 1.00MM PITCH, TOP ENTRY, DIP TYPE

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [MM]		TOLERANCES EXCEPT AS NOTED	
.X	± .10	ØX	± .10
.XX	± .020	ØXXX	± .015
.XXX	± .015	ØXXXX	± .010
APPROVALS	DATE		
DRAWN	DY	10/07/09	
CHECKED			
APPROVED			
SIZE	PART NO.	PCA-3-XX-V-3-20	REV.
REF: S00030T	SCALE: NTS		SHEET 1 OF 1