

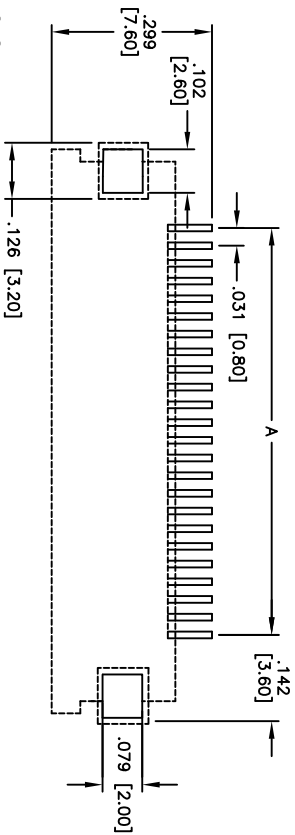


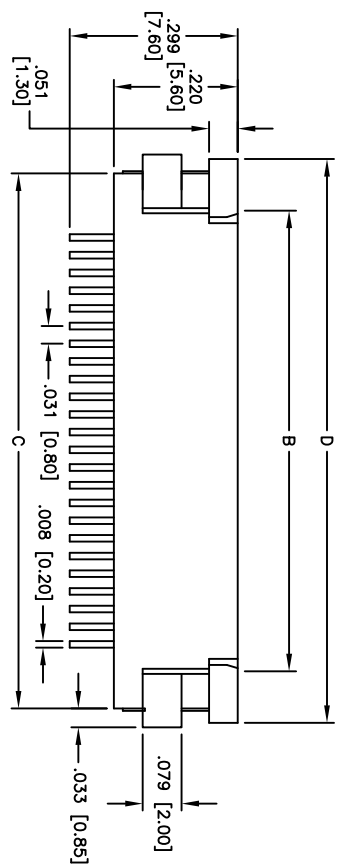


Rev	AWO #	Description	Date	Appr
-		RELEASED	5/06/10	

APPROVED: _____
 DATE: _____ TITLE: _____



FLEXIBLE CABLE
 Positions: 4 thru 32
 A = .031 [0.80] x No. of (Positions-1)
 B = A + .067 [1.70]
 C = A + .228 [5.80]
 D = A + .280 [7.10]

SPECIFICATIONS:
 Material: LCP, Glass reinforced, rated UL 94V-0
 Insulator color: Natural
 Contacts: Phosphor Bronze

Plating: Tin over Copper underplate overall

Electrical: Operating voltage: 50 VAC max

Current rating: 0.5 Amps max

Contact resistance: 30 mohms max initial

Insulation resistance: 500 Mohms min

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating: Operating temperature: -40°C to +85°C

Environmental: Lead free, RoHS compliant

Recommended soldering temp: 260°C for 5 seconds



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: ZIF FLEX CIRCUIT CONNECTOR
 SIDE ENTRY, LOWER CONTACT, SMT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	DATE
DRAWN	DY
CHECKED	5/06/10
APPROVED	

SIZE	PART NO.	REV.
X	PCA-5-XX-HL-3	-
REF: S00030T	SCALE: NTS	SHEET 1 OF 1