


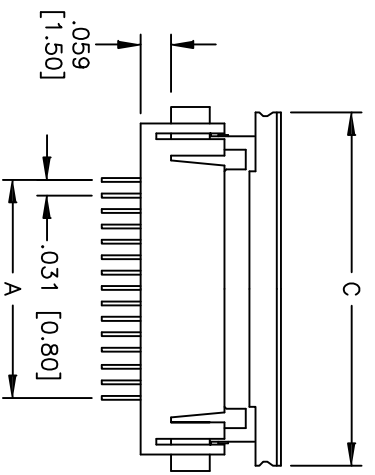



Rev	AWO #	Description	Date	Appr
-		RELEASED	12/10/04	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

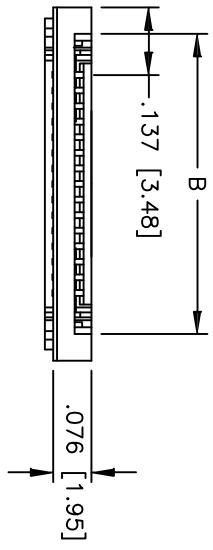

UPPER CONTACT

PACKAGED ON TAPE & REEL

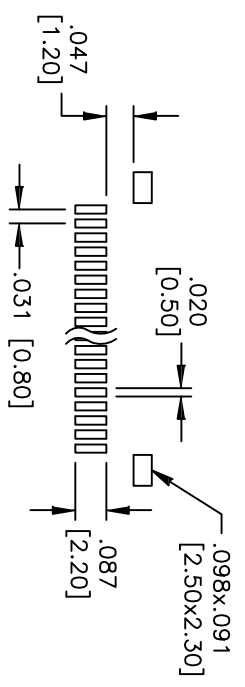

PCB LAYOUT

Positions: 3 thru 30  
 A = .031 [0.80] x No. of Spaces  
 B = A + .081 [2.05]  
 C = A + .228 [5.80]

**SPECIFICATIONS:**

- Material: Insulator: LCP, Glass reinforced, rated UL 94V-0
- Insulator color: Natural
- Contacts: Phosphor Bronze
- Plating: Tin over Copper underplate overall
- Electrical: Operating voltage: 100 VAC max  
 Current rating: 0.5 Amps max  
 Contact resistance: 30 mohms max initial  
 Insulation resistance: 500 Mohms min  
 Dielectric withstanding voltage: 500 VAC for 1 minute  
 Temperature Rating: Operating temperature: -40°C to +85°C
- Environmental: Lead free, RoHS compliant

**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

**ZIF FLEX CIRCUIT CONNECTOR**  
 SIDE ENTRY, UPPER CONTACT, SMT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN	SS
CHECKED	10/4/04
APPROVED	

SIZE	PART NO.	REV.
X	PCA-5-XX-HU-3-TR	-
REF:	SCALE: NTS	SHEET 1 OF 1