
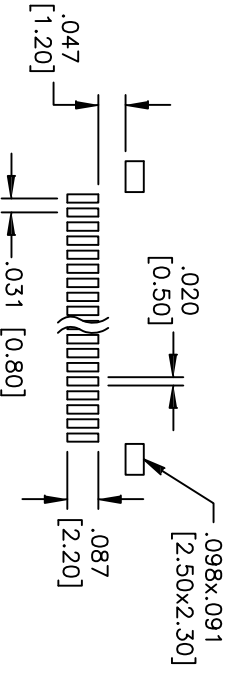

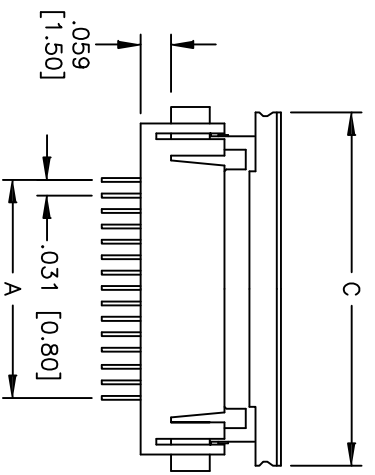


Rev	AWO #	Description	Date	Appr
-		RELEASED	12/10/04	

APPROVED: _____
 DATE: _____ TITLE: _____

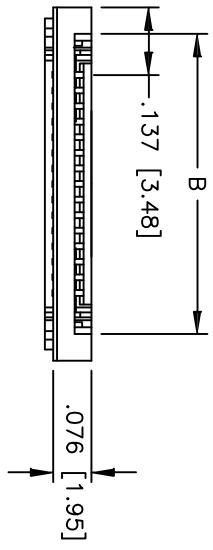

PCB LAYOUT

Positions: 3 thru 30
 A = .031 [0.80] x No. of Spaces
 B = A + .081 [2.05]
 C = A + .228 [5.80]

SPECIFICATIONS:

Material:

Insulator: LCP, Glass reinforced, rated UL 94V-0

Insulator color: Natural

Contacts: Phosphor Bronze

Plating:

Tin over Copper underplate overall

Electrical:

Operating voltage: 100 VAC max

Current rating: 0.5 Amps max

Contact resistance: 30 mohms max initial

Insulation resistance: 500 Mohms min

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

Operating temperature: -40°C to +85°C

Environmental:

Lead free, RoHS compliant



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: ZIF FLEX CIRCUIT CONNECTOR
 SIDE ENTRY, UPPER CONTACT, SMT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	HOLDS
.X ± .10	ØX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN	SS
CHECKED	10/4/04
APPROVED	

SIZE	PART NO.	SCALE	NTS	SHEET	1 OF 1
X	PCA-5-XX-HU-3				
REV.					