



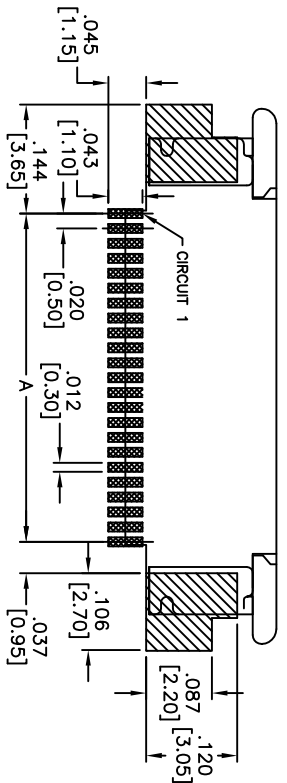
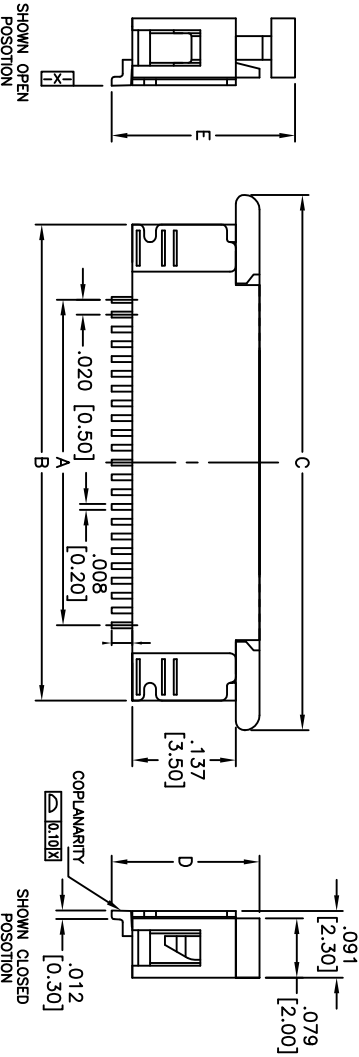


Rev	AWO #	Description	Date	Appr
-	10635	RELEASED	10/12/10	

APPROVED: _____
 DATE: _____ TITLE: _____

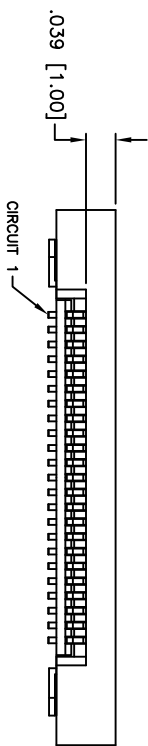

Positions: 3 thru 60
 A = .020 [0.50] x No. of Spaces
 B = A + .201 [5.10]
 C = A + .280 [7.10]
 D = .197 [5.00] ... 03 thru 30
 = .213 [5.40] ... 31 thru 60
 E = D + .047 [1.20]

SPECIFICATIONS:

Material:
 Insulator: Hi-temp thermoplastic, rated UL 94V-0
 Insulator color: Natural
 Contacts: Copper Alloy
 Plating:
 Tin over Copper underplate overall
Electrical:
 Operating voltage: 50 VAC max
 Current rating: 0.4 Amps max
 Contact resistance: 30 mohms max initial
 Insulation resistance: 500 Mohms min
 Dielectric withstanding voltage: 500 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -55°C to +85°C
Environmental:
 Lead free, RoHS compliant.
 Recommended soldering temp: 260°C for 5 sec.



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES Holes
 .X ± .10
 .XX ± .020
 .XXX ± .015
 .XXX ± .010
 APPROVALS

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710
ZIF FLEX CIRCUIT CONNECTOR
 SIDE ENTRY, SMT

DRAWN	DY	10/12/10	SIZE	PART NO.	PCA-6-XX-HX-3	REV.
CHECKED						
APPROVED						
REFERENCES			SCALE:	NTS	SHEET	1 OF 1