



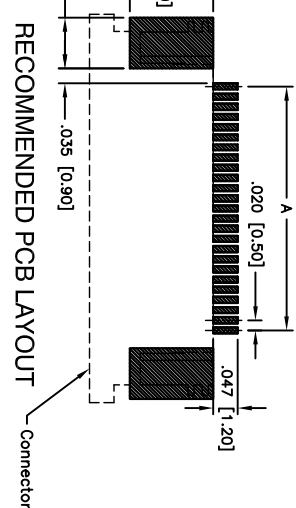

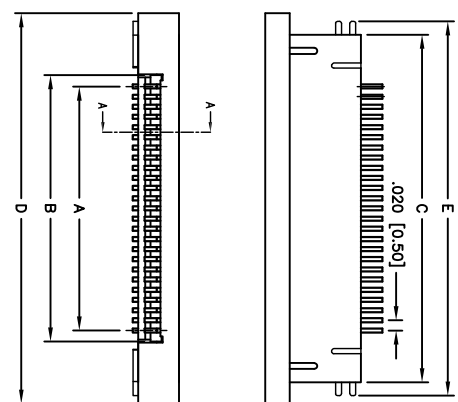


Rev	AWO #	Description	Date	Appr
-		RELEASED	9/20/10	

APPROVED: _____
 DATE: _____ TITLE: _____



SPECIFICATIONS:

Material: Insulator: Hi-temperthermoplastic, rated UL 94V-0
 Contacts: Phosphor Bronze
Plating: Tin over Copper underplate overall
Electrical: Operating voltage: 50 VAC max
 Current rating: 0.5 Amps max
 Contact resistance: 20 mohms max initial
 Insulation resistance: 50 Mohms min
 Dielectric withstanding voltage: 250 VAC for 1 minute
Temperature Rating: Operating temperature: -20°C to +85°C
Environmental: Lead free, RoHS compliant.
Recommended soldering temp: 260°C for 5 sec.

Positions: 3 thru 61
 A = .020 [0.50] x No. of Spaces
 B = .020 [0.50] x No. of Spaces +.043 [1.10]
 C = .020 [0.50] x No. of Spaces +.201 [5.10]
 D = .020 [0.50] x No. of Spaces +.280 [7.10]
 E = .020 [0.50] x No. of Spaces +.252 [6.40]

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

INCHES	HOLES
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010

APPROVALS

DATE	DATE
AY	9/20/10
JL	9/20/10

DRAWN		AY	9/20/10	SIZE	PART NO.	REV.
CHECKED		JL	9/20/10	X	PCA-6L-XX-HL-3	-
APPROVED				REF:	SCALE: NTS	SHEET 1 OF 1

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

ZIF FLEX CIRCUIT CONNECTOR
 SIDE ENTRY, LOWER CONTACT, SMT