Rev	AWO #	Description	Date	Appr
-		RELEASED	8/06/09	

APPROVED: _____

DATE: _____ TITLE: _____

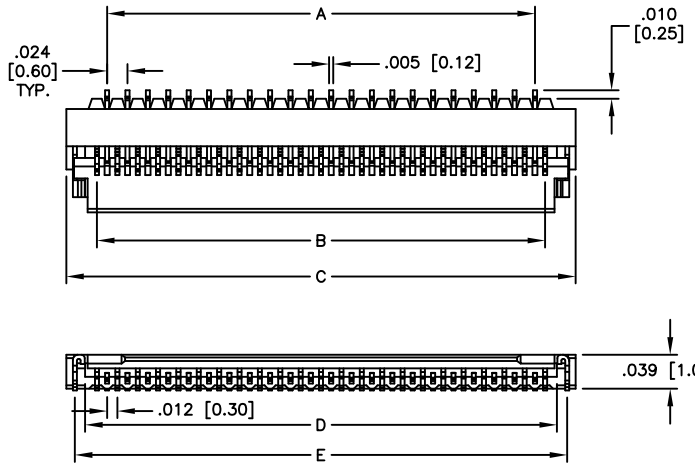

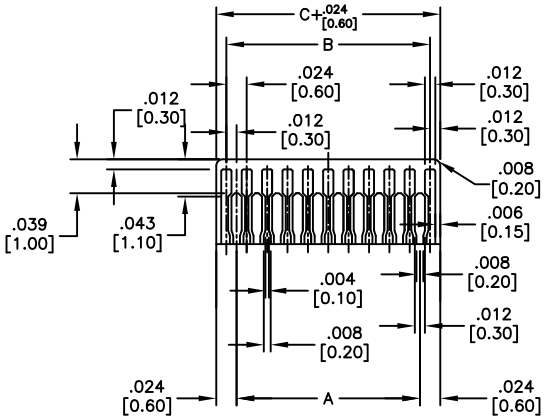

APPLICABLE FPC
THICKNESS 0.20±0.02mm

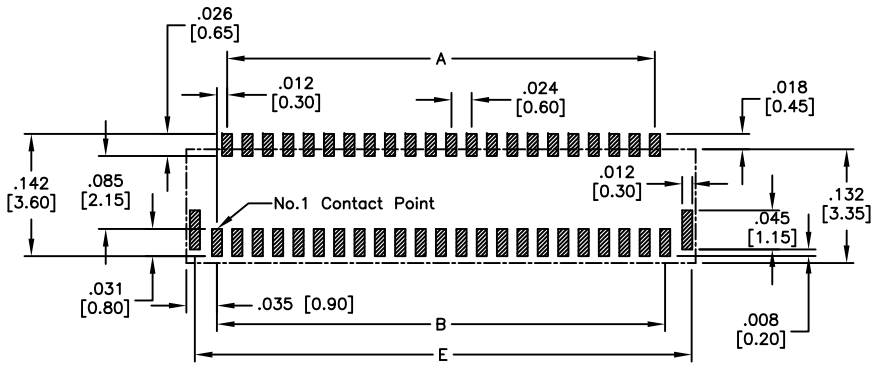

RECOMMENDED PCB LAYOUT

Postitions: 13, 15, 17, 19, 21, 23, 25, 27, 29, 31, 33, 35, 37, 39 ,41, 45, 49, 51, 57, 61, 71

A = .012 [0.30] x No. of (Postions−3)

B = A + .024 [0.60]

C = A + .094 [2.40]

D = A + .048 [1.23]

E = A + .075 [1.90]

SPECIFICATIONS:
Material:
Housing: Hi−temp thermoplastic, rated UL 94V−0
Actuator: Hi−temp thermoplastic, UL 94V−0
Terminal: Copper Alloy
Holddown: Copper Alloy
Plating:
Gold over Copper underplate overall
Electrical:
Operating voltage: 50 VAC max
Current rating: 0.5 Amps max
Temperature Rating:
Operating temperature: −25°C to +85°C
Environmetal:
Lead free, RoHS compliant.
Recommended soldering temp: 260°C for 5 sec.

RoHS COMPLIANT

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

INCHES		HOLES	
.X	± .10	Ø.X	±.10
.XX	± .020	Ø.XX	±.015
.XXX	± .015	Ø.XXX	±.010

APPROVALS		DATE
DRAWN	DY	8/06/09
CHECKED		
APPROVED		

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

TITLE: ZIF FLEX CIRCUIT CONNECTOR 0.60MM PITCH

SIZE	PART NO.	REV.
X	PCA-8-XX-H-3	-

REF: S00030T | SCALE: NTS | SHEET 1 OF 1