
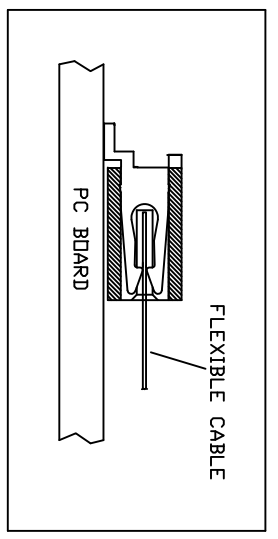
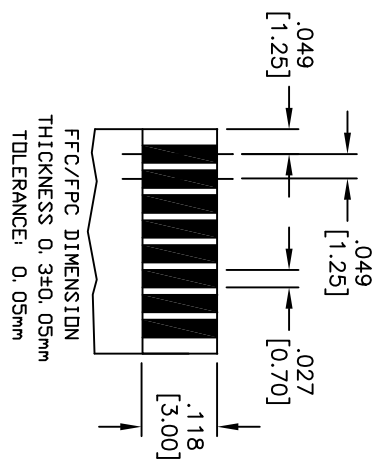
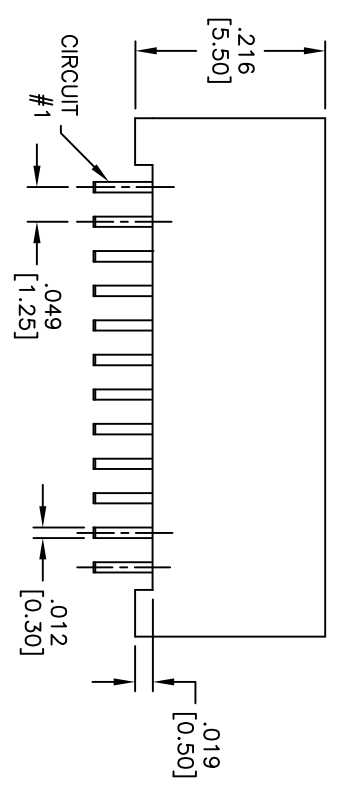
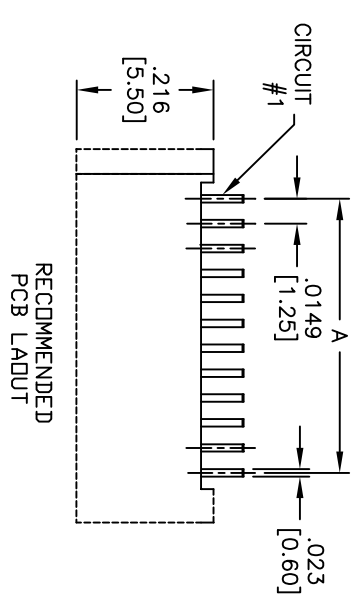
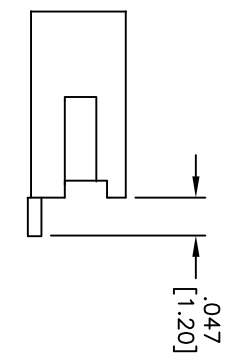


Rev	AWO #	Description	Date	Appr
-		RELEASED	10/8/08	

APPROVED: _____
 DATE: _____ TITLE: _____

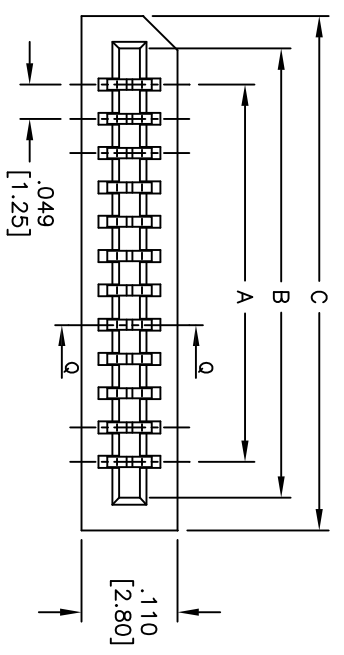

SPECIFICATIONS:

Material: Hi-Temp Thermoplastic, rated UL 94V-0
Insulator color: Black
Contacts: Phosphor Bronze
Plating: Gold flash over Nickel underplate overall

Electrical:
Operating voltage: 250 VAC RMS max
Current rating: 1 Amp max
Contact resistance: 25 mohms max initial
Insulation resistance: 1000 Mohms min
Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating:
Operating temperature: -55°C to +85°C
Environmental:
Lead free, RoHS compliant



Recommended soldering temp: 260°C for 5 seconds

Positions: 3 thru 32
 A = .049 [1.25] x No. of Spaces
 B = A + .102 [2.60]
 C = A + .157 [4.00]

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES HOLDS ±.10
 .XX ±.020 ØXX ±.015
 .XXX ±.015 ØXXX ±.010

APPROVALS	DATE
SS	10/8/08

DRAWN	SS
CHECKED	
APPROVED	

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE	SIZE	PART NO.	REV.
LIF FLEX CIRCUIT CONNECTOR, .049" [1.25] CENTERLINE, SIDE ENTRY, SMT	X	PCB-B-XX-SA-SMT-G	-
REF:	SCALE: NTS	SHEET 1 OF 1	