
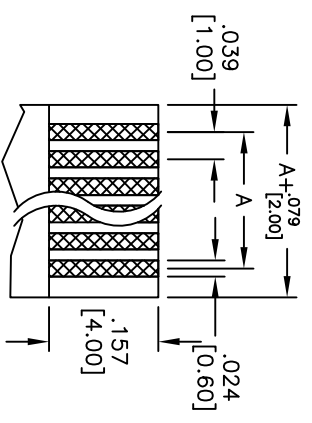

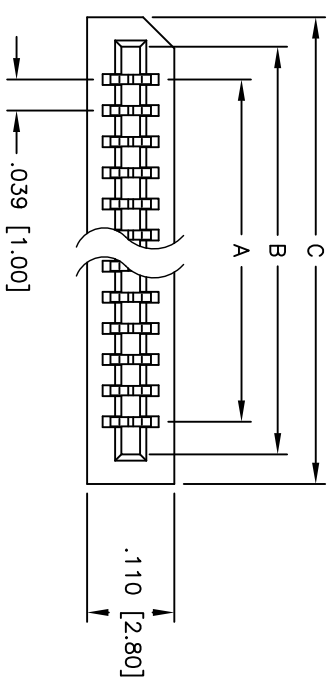
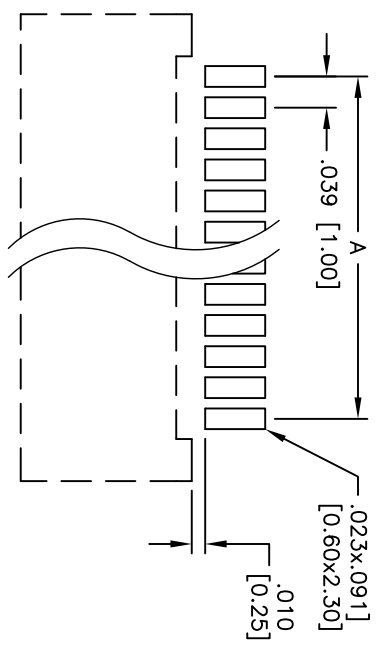


Rev	AWO #	Description	Date	Appr
-		RELEASED	3/23/05	

APPROVED: _____ TITLE: _____
 DATE: _____

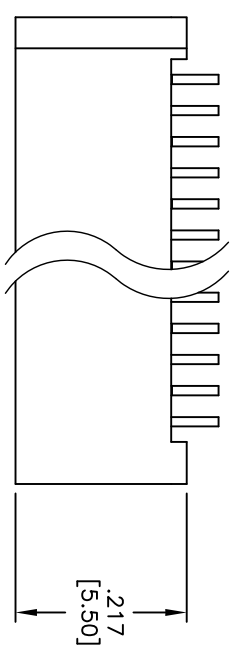

PACKAGED ON TAPE & REEL

FPC/FFC T=.012±.002 [0.30±0.05]

SPECIFICATIONS:
 Material: Insulator: Hi-Temp, thermoplastic, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
 Plating: Tin over Copper underplate overall

Positions: 2 thru 36
 A = $.039 [1.00]$ x No. of Spaces
 B = A + $.082 [2.10]$
 C = A + $.157 [4.00]$

Electrical:
 Operating voltage: 100 VAC max
 Current rating: 0.5 Amps max
 Contact resistance: 30 mohms max initial
 Insulation resistance: 1000 Mohms min
 Dielectric withstanding voltage: 500 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -55°C to $+85^{\circ}\text{C}$



Environmental:
 Lead free, RoHS compliant
 Recommended soldering temp: 260°C for 5 seconds

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	± .10
.XX ± .020	± .015
.XXX ± .015	± .010
APPROVALS	DATE
SS	3/23/05
CHECKED AY	7/28/10
APPROVED	

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: LIF FLEX CIRCUIT CONNECTOR
 SIDE ENTRY, SMT

DRAWN	SS	3/23/05	SIZE	PART NO.	PCB-C-XX-SA-SMT-T1R	REV.
CHECKED	AY	7/28/10	X			
APPROVED			REF:	S00043T	SCALE: NTS	SHEET 1 OF 1

6 5 4 3 2 1