
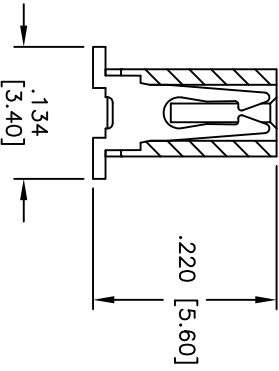
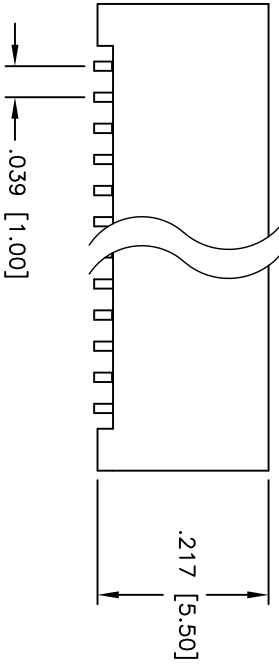
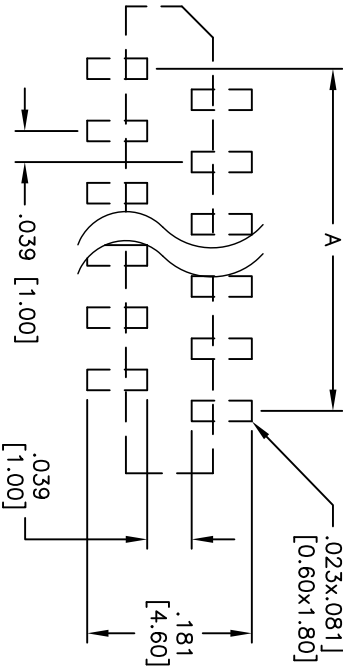


| Rev | AWO # | Description | Date | Appr |
|-----|-------|-------------|---------|------|
| - | | RELEASED | 3/23/05 | |

APPROVED: _____
 DATE: _____ TITLE: _____

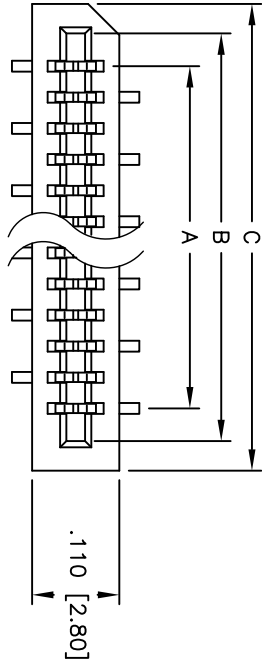

Positions: 3 thru 30
 A = .039 [1.00] x No. of Spaces
 B = A + .090 [2.30]
 C = A + .157 [4.00]

NOTE: PACKAGED ON TAPE & REEL

SPECIFICATIONS:
 Material: Hi-Temp Thermo-plastic, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
 Plating:
 Tin over Copper underplate overall
 Electrical:
 Operating voltage: 100 VAC max
 Current rating: 0.5 Amps max
 Contact resistance: 30 mohms max initial
 Insulation resistance: 1000 Mohms min
 Dielectric withstanding voltage: 500 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -55°C to +85°C
 Environmental:
 Lead free, RoHS compliant
 Recommended soldering temp: 260°C for 5 seconds



ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

| UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED | | INCHES | | Holes | | DATE | | TITLE | |
|---|--------|--------|--------|---------|--------|-----------------------------|--|----------------------------|--|
| .X | ± .10 | ØX | ± .10 | ØXXX | ± .015 | | | | |
| .XX | ± .020 | ØXXX | ± .015 | ØXXX | ± .010 | | | | |
| .XXX | ± .015 | ØXXX | ± .010 | | | | | | |
| DRAWN | | SS | | 3/23/05 | | TITLE | | LIF FLEX CIRCUIT CONNECTOR | |
| CHECKED | | AY | | 7/28/10 | | TOP ENTRY, SMT, TAPE & REEL | | PCB-C-XX-T-SMT-T/R | |
| APPROVED | | | | | | SIZE | | PART NO. | |
| | | | | | | X | | S00043T | |
| | | | | | | REF: | | SCALE: NTS | |
| | | | | | | | | SHEET 1 OF 1 | |