
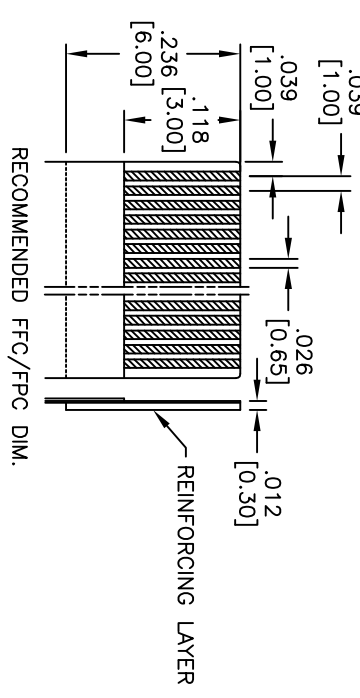
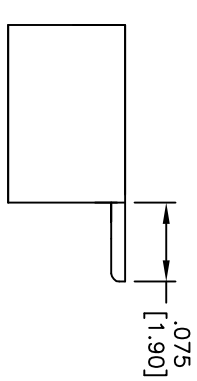
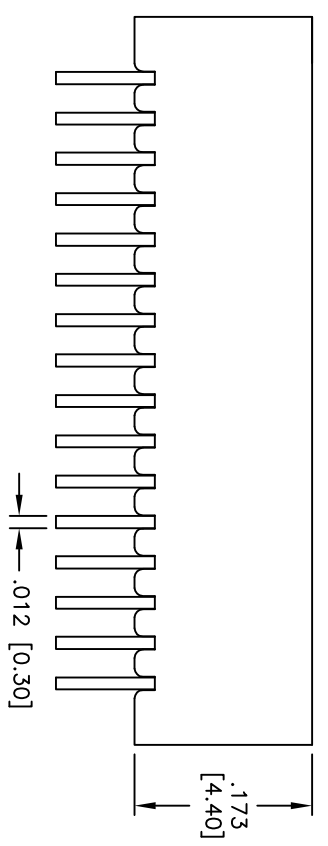
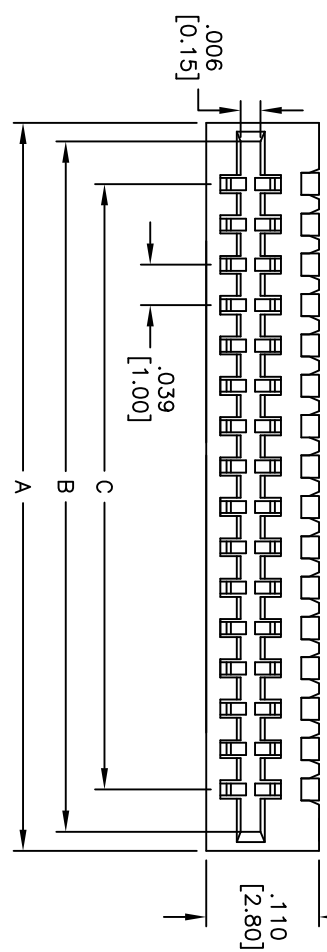


Rev	AWO #	Description	Date	Appr
-		RELEASED	11/26/10	

APPROVED: _____ TITLE: _____
 DATE: _____

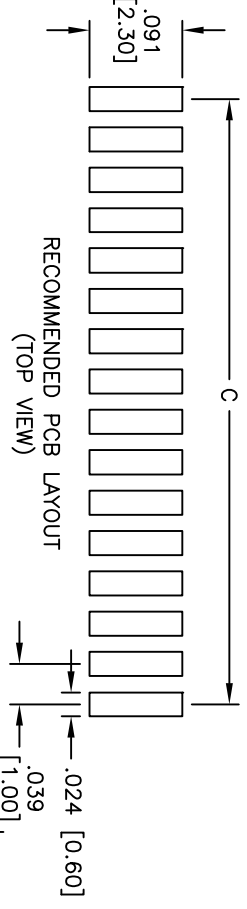

Positions: 4 thru 30
 A = .039 [1.00] x No. of Spaces + .118 [3.00]
 B = .039 [1.00] x No. of Spaces + .083 [2.10]
 C = .039 [1.00] x No. of Spaces

SPECIFICATIONS:

Material:
 Insulator: Hi-Temp, thermoplastic, rated UL 94V-0
 Insulator color: Black
 Contacts: Phosphor Bronze
 Plating:
 Tin over Copper underplate overall

Electrical:
 Operating voltage: 50 VAC max
 Current rating: 0.5 Amps max
 Contact resistance: 20 mohms max initial
 Insulation resistance: 800 Mohms min
 Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:
 Operating temperature: -25°C to +85°C

Environmental:
 Lead free, RoHS compliant
 Recommended soldering temp: 260°C for 5 seconds



ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

UNLESS OTHERWISE SPECIFIED		TITLE	
ALL DIMENSIONS ARE INCHES [MM]		LIF FLEX CIRCUIT CONNECTOR	
TOLERANCES: EXCEPT AS NOTED		SIDE ENTRY, SMT	
INCHES			
HOLES			
X ± .10	ØXX ± .10		
.XX ± .020	ØXXX ± .015		
.XXX ± .015	ØXXX ± .010		
APPROVALS		DATE	
DRAWN	AY	11/26/10	
CHECKED	AW	11/26/10	
APPROVED			
SIZE	PART NO.	SCALE:	REV.
X	PCB-C2-XX-SA-SMT	NTS	-
REF:	S0067T	SHEET	1 OF 1