





Rev	AWO #	Description	Date	Appr
-	11398	RELEASED	5/26/11	

APPROVED: _____
 DATE: _____ TITLE: _____

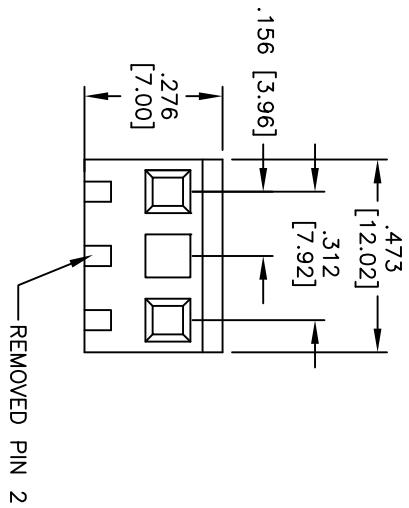

SPECIFICATIONS:

Material: Nylon 66, rated UL 94V-0
 Insulator color: Natural
 Contacts: Brass
 Plating: Tin over Copper underplate overall
 Electrical: Tin over Copper underplate overall

Operating voltage: 250 VAC max.
 Current rating: 5 Amps max.
 Contact resistance: 6 mohms max. initial
 Insulation resistance: 50K Mohms min.
 Dielectric withstanding voltage: 1,500 VAC for 1 minute
 Mechanical:
 Recommended PCB thickness: 0.062" (1.57mm)

Temperature Rating: 0°C to +85°C
 Operating temperature: 0°C to +85°C
 Environmental:
 Lead free, RoHS compliant
 Recommended soldering temp: 235°C for 5 seconds



ADAM TECH

909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .156 [3.96] PCB CONNECTOR, TOP ENTRY
 TOP ENTRY, NO HOOK, WITH LOCKING RAMP

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		INCHES		HOLDERS	
.X	± .10	ØX	± .10		
.XX	± .020	ØXXX	± .015		
.XXX	± .015	ØXXX	± .010		
APPROVALS		DATE			
DRAWN	DY	5/26/11			
CHECKED					
APPROVED					
SIZE	PART NO.	PCD-A-03-NH-X02		REV.	-
REF:	S00123T	SCALE:	NTS	SHEET	1 OF 1