
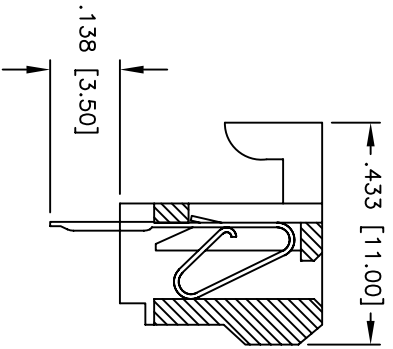
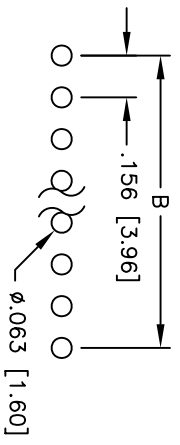
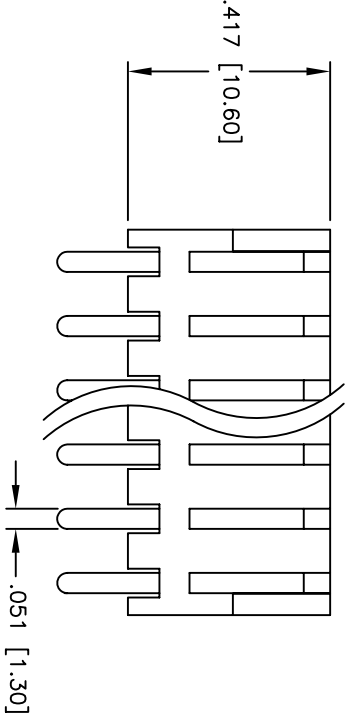


Rev	AWO #	Description	Date	Appr
-		RELEASED	6/2/05	

APPROVED: _____
 DATE: _____ TITLE: _____

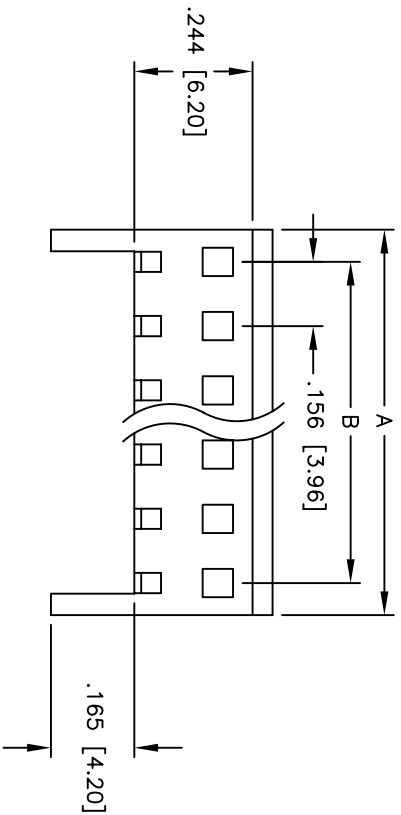

SPECIFICATIONS:

- Material: Insulator: Nylon 66, rated UL 94V-0
- Insulator color: Natural
- Contacts: Phosphor Bronze
- Plating: Tin over Copper underplate overall
- Electrical: Operating voltage: 250 VAC max.
- Current rating: 7 Amps max.
- Contact resistance: 10 mohms max. initial
- Insulation resistance: 1,000 Mohms min.
- Dielectric withstanding voltage: 1,500 VAC for 1 minute
- Mechanical: Recommended PCB thickness: 0.063" (1.60mm)
- Temperature Rating: Operating temperature: -40°C to +105°C
- Environmental: Lead free, RoHS compliant
- Recommended soldering temp: 235°C for 5 seconds

Positions: 02 thru 20
 A = .156 [3.96] x No. of Positions
 B = .156 [3.96] x No. of Spaces

UNLESS OTHERWISE SPECIFIED	
ALL DIMENSIONS ARE IN INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	HOLDS
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	DATE
DRAWN	SS
CHECKED	
APPROVED	

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .156 [3.96] PCB CONNECTOR BOARD HOOKS, TOP ENTRY
 SIZE: X
 PART NO.: PCD-A-XX
 SCALE: NTS
 SHEET 1 OF 1

