
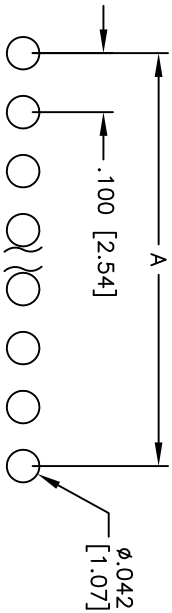
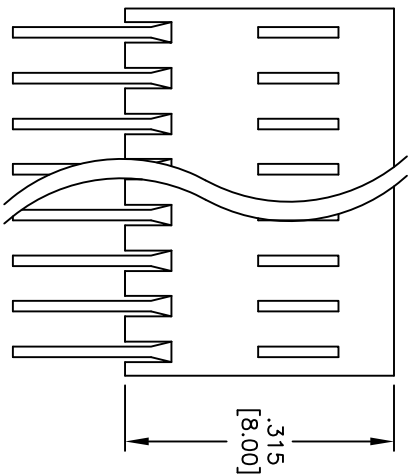
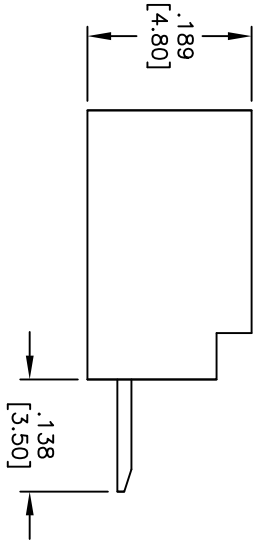


APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

Rev	AWO #	Description	Date	Appr
-		RELEASED	10/09/08	
A		REDRAWN	6/10/09	
B		REVISED SPEC.	10/22/10	

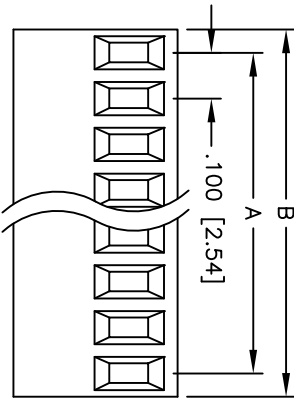

RECOMMENDED PCB LAYOUT

Positions: 02 thru 29  
 A = .100 [2.54] x No. of Positions + .001 [0.02]  
 B = .100 [2.54] x No. of Spaces

**SPECIFICATIONS:**

Material: Nylon 66, rated UL 94V-0  
 Insulator color: White  
 Contacts: Phosphor Bronze

Plating:  
 Tin over Copper underplate overall

Electrical:  
 Operating voltage: 250 VAC max.

Current rating: 2.5 Amps max.

Contact resistance: 20 mohms max. initial

Dielectric withstanding voltage: 1,500 VAC for 1 minute


Temperature Rating:

Operating temperature: 0°C to +75°C

Environmental:

Lead free, RoHS compliant

Recommended soldering temp: 235°C for 5 seconds



**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE  
 .100 [2.54] PCB CONNECTOR  
 NO HOOKS, TOP ENTRY

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	DATE
DRAWN	SS
CHECKED	
APPROVED	

SIZE	PART NO.	REV.
X	PCE-A-XX-NH	B
REF: S00099T	SCALE: NTS	SHEET 1 OF 1