
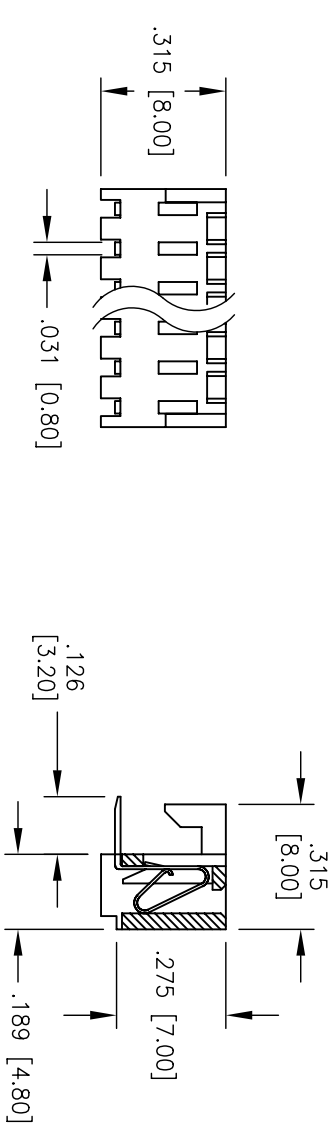


Rev	AWO #	Description	Date	Appr
-		RELEASED	9/28/04	

APPROVED: _____
 DATE: _____ TITLE: _____

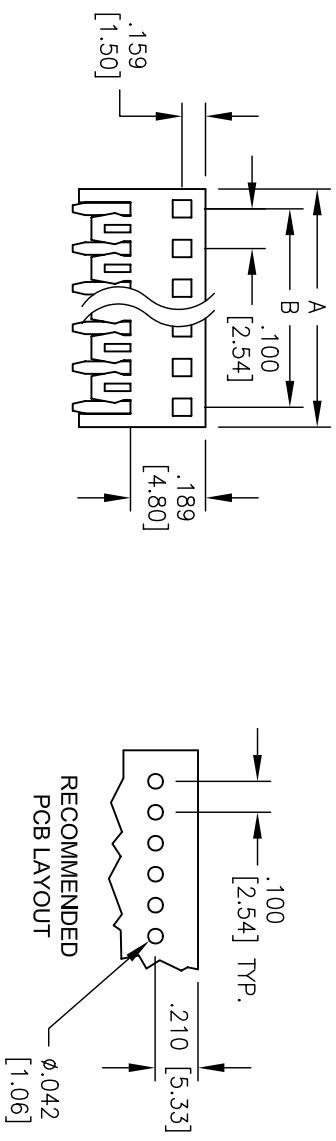

A = .100 [2.54] x No. of Positions
 B = .100 [2.54] x No. of Spaces

SPECIFICATIONS:
 Material: Nylon 66, rated UL 94V-0
 Insulator color: Natural
 Contacts: Phosphor Bronze
 Plating: Tin over Copper underplate overall.
 Electrical:
 Operating voltage: 250 VAC max
 Current rating: 3 Amps max
 Insulation resistance: 1000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 1500 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -40°C to +105°C

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED INCHES HOLES	
.X ± .10	Ø.X ± .10
.XX ± .020	Ø.XX ± .015
.XXX ± .015	Ø.XXX ± .010
APPROVALS	DATE
DRAWN SS	9/28/04
CHECKED	
APPROVED	

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .100" RECEPTACLE WITH HOOKS
 TIN PLATED, 02 THRU 20 POSITIONS

SIZE	PART NO.	REV.
X	PCE-B-XX	-
REF:	SCALE: NTS	SHEET 1 OF 1