| Rev | AWO # | Description | Date | Appr |
|---|---|---|---|---|
| - | | RELEASED | 9/28/04 | |

APPROVED: _____

DATE: _____ TITLE: _____

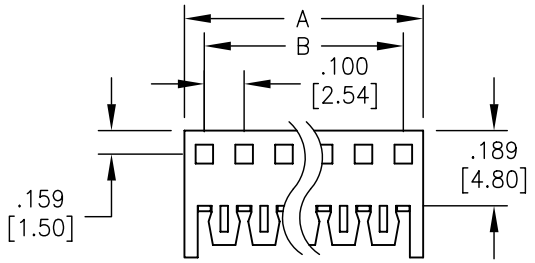


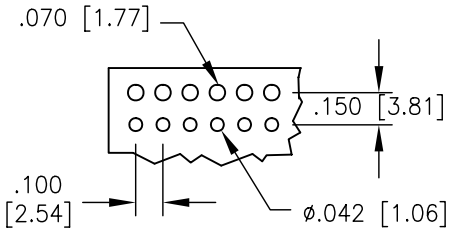


RECOMMENDED
PCB LAYOUT

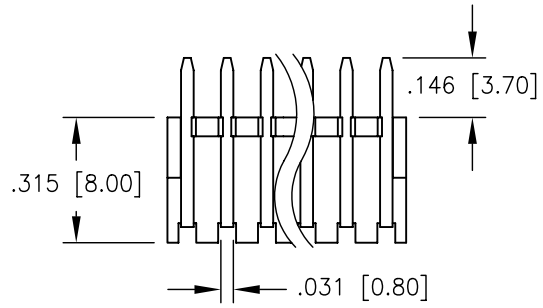


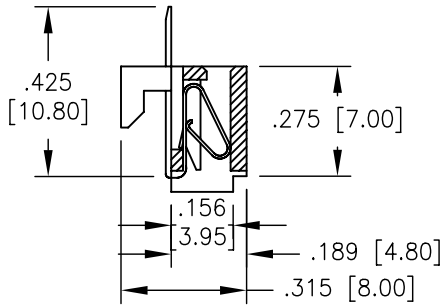


A = .100 [2.54] x No. of Positions
B = .100 [2.54] x No. of Spaces

SPECIFICATIONS:
Material:
Insulator: Nylon 66, rated UL 94V-0
Insulator color: Natural
Contacts: Phosphor Bronze
Plating:
Tin over Copper underplate overall.
Electrical:
Operating voltage: 250 VAC max
Current rating: 3 Amps max
Insulation resistance: 1000 Mohms min @ 500 VDC
Dielectric withstanding voltage: 1500 VAC for 1 minute
Temperature Rating:
Operating temperature: -40°C to +105°C

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED

| INCHES | | HOLES | |
|---|---|---|---|
| .X | ± .10 | Ø.X | ±.10 |
| .XX | ± .020 | Ø.XX | ±.015 |
| .XXX | ± .015 | Ø.XXX | ±.010 |

| APPROVALS | | DATE |
|---|---|---|
| DRAWN | SS | 9/28/04 |
| CHECKED | | |
| APPROVED | | |


**ADAM TECH**
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710


TITLE
.100" RECEPTACLE WITH HOOKS
TIN PLATED, 02 THRU 20 POSITIONS

| SIZE | PART NO. | REV. |
|---|---|---|
| X | PCE-C-XX | - |

REF: | SCALE: NTS | SHEET 1 OF 1