

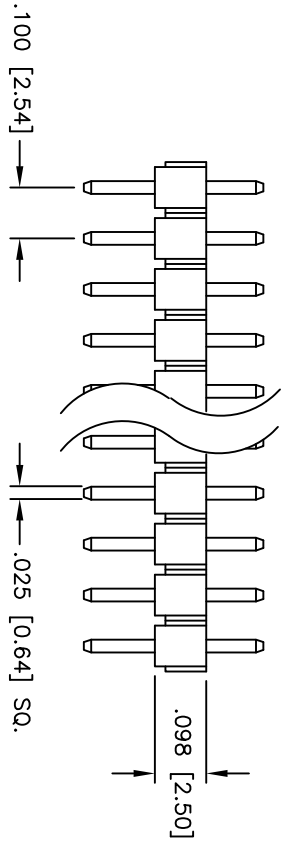
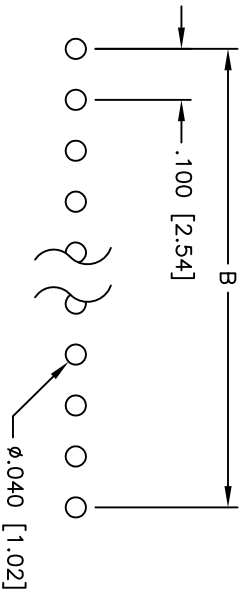


Rev	AWO #	Description	Date	Appr
-		RELEASED	6/13/11	

APPROVED: _____
 DATE: _____ TITLE: _____

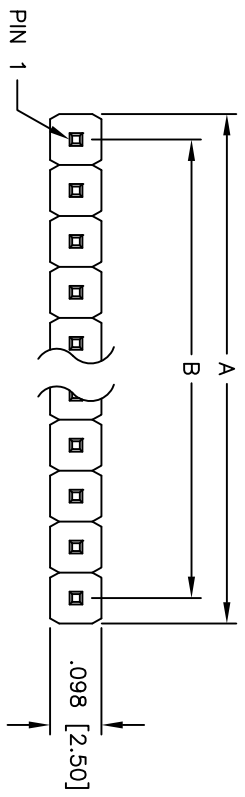

SPECIFICATIONS:
 Material: PBT, glass reinforced, rated UL 94V-0
 Insulator color: Black
 Contacts: Brass
 Plating: Gold flash over Nickel underplate overall

Positions: 1 thru 40
 A = .100 [2.54] x No. of Positions
 B = .100 [2.54] x No. of Spaces

Electrical:
 Current rating: 3 Amps
 Contact resistance: 20 mohms max @ DC 100mA
 Insulation resistance: 5,000 Mohms min @ DC 500V
 Dielectric voltage: AC 500V for 1 minute
 Temperature Rating: Operating temperature: -55°C to +105°C

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

Environmental:
 Lead free, RoHS compliant
 Recommended soldering temp: 235°C for 5 seconds



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN	DY
CHECKED	6/13/11
APPROVED	

TITLE: .100 [2.54] SINGLE ROW PIN HEADER
 GOLD PLATED

SIZE	PART NO.	REV.
X	PH1-XX-U-.157/.355	-
REF:	S00039T	SCALE: NTS
SHEET 1 OF 1		