
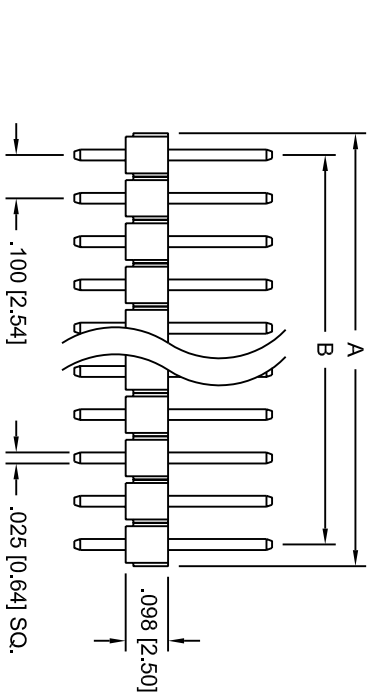


Rev	AWO #	Description	Date	Appr
-		RELEASED	10/5/04	

APPROVED: _____
 DATE: _____ TITLE: _____

PCB LAYOUT

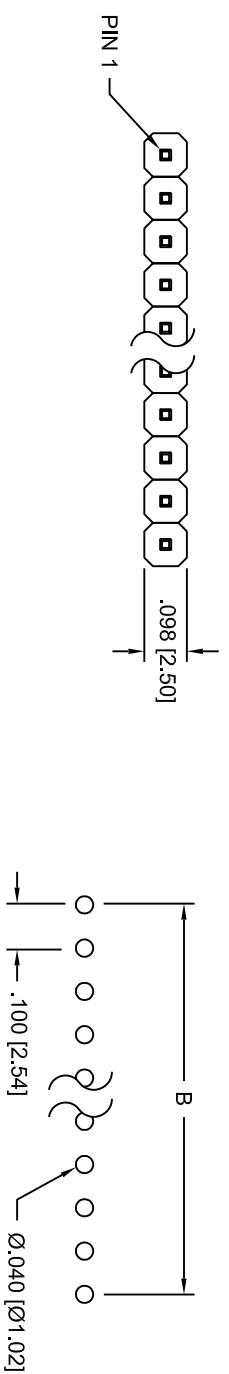

A = .100 [2.54] X No. of Positions.
 B = .100 [2.54] X No. of Spaces.
 1 THRU 40 PINS AVAILABLE



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: PIN HEADER, SINGLE ROW, .100 PITCH
 STRAIGHT, .235 MATING / .120 TAIL

SPECIFICATIONS:
 Material: Insulator: Nylon 6T, rated UL 94V-0
 Insulator color: Black
 Contacts: Brass
 Plating: Gold Flash over Nickel underplate overall
 Electrical: Operating voltage: 250 VAC max
 Current rating: 3 Amps max
 Contact resistance: 20 mohms max
 Insulation resistance: 5000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 500 VAC for 1 minute
 Temperature Rating: Operating temperature: -40°C to +105°C
 Environmental: Lead free, RoHS complaint

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN	SS
CHECKED	10/5/04
APPROVED	

SIZE	PART NO.	REV.
X	PH1-XX-UA-RC	-
REF:	SCALE: NTS	SHEET 1 OF 1