
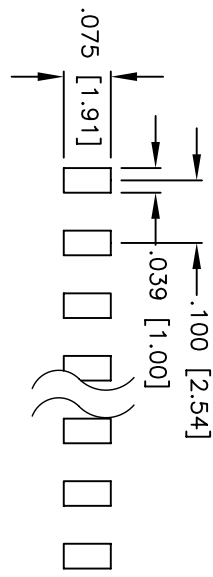




Rev	AWO #	Description	Date	Appr
-		RELEASED	3/21/06	

APPROVED: _____
 DATE: _____ TITLE: _____

CUSTOM CABLE ASSEMBLIES ARE
 NON-CANCELLABLE/NON-RETURNABLE

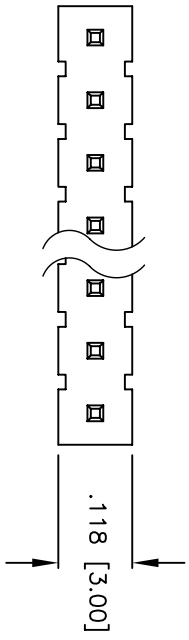

**RECOMMENDED
 SOLDER PAD LAYOUT**

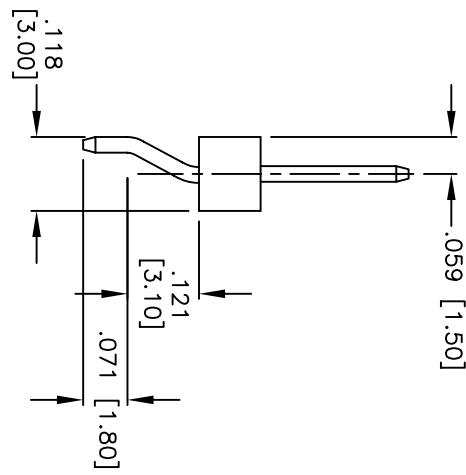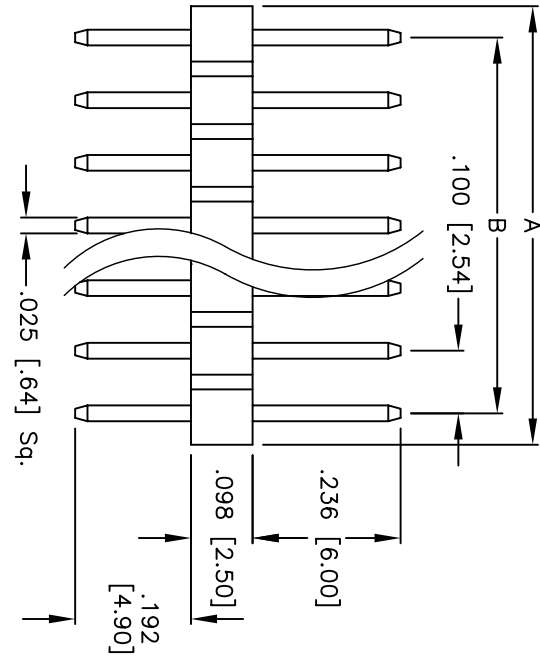

A = .100 [2.54] X No. of Positions
 B = .100 [2.54] X No. of Spaces

SPECIFICATIONS:

- Material: Nylon 6t, rated UL 94V-0
- Contacts: Brass
- Plating: Tin over copper underplate overall
- Electrical:
 - Operation voltage: 250 VAC max
 - Current rating: 3 Amps max
 - Contact resistance: 20 mohms max
 - Insulation resistance: 5000 Mohms min @ 500 VDC
 - Dielectric withstanding voltage: 500 VAC min rms
- Environment:
 - Operating temperature: -40°C to +105°C
 - Lead free, RoHS compliant
 - Recommended soldering temp: 260 for 5 sec.



UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED	
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	DATE
DRAWN	LFJ
CHECKED	
APPROVED	

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE	Single Row Right Angle Low Profile, Surface Mount	
SIZE	PART NO.	REV.
X	PH1RB-XX-TA-SMT	-
REF:	SCALE: NTS	SHEET 1 OF 1

