
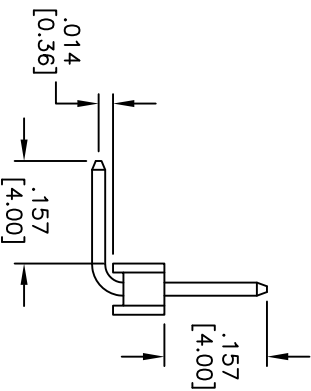
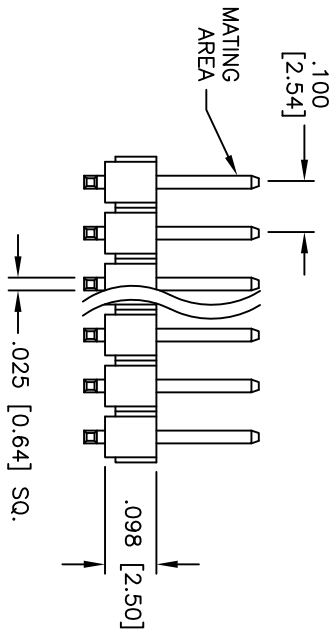
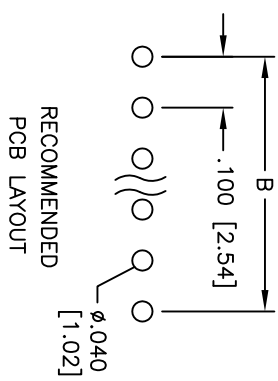


Rev	AWO #	Description	Date	Appr
-		RELEASED	1/11/11	

APPROVED: _____
 DATE: _____ TITLE: _____

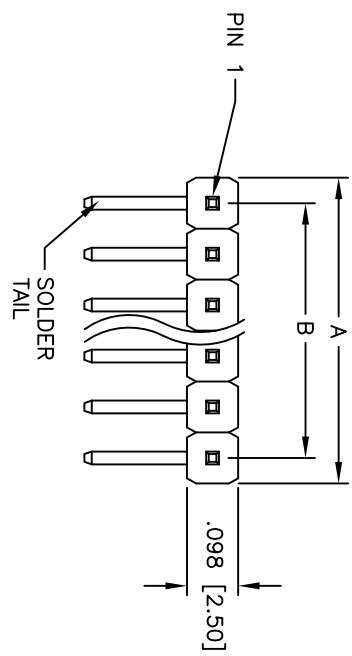

A = .100 [2.54] x No. of Spaces + .086 [2.19]
 B = .100 [2.54] x No. of Spaces

SPECIFICATIONS:

Material: Insulator: Hi-temp thermoplastic, rated UL 94V-0
 Insulator color: Black
Contacts: Brass

Plating: Gold flash over Nickel underplate overall.

Electrical:
 Current rating: 3 Amps max
 Contact resistance: 20 mohms max @ 500 VDC
 Insulation resistance: 5,000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating:
 Operating temperature: -40°C to +105°C

Environmental:
 Lead free, RoHS compliant
 Recommended soldering temp: 260°C for 5 seconds



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .100 [2.54] SINGLE ROW PIN HEADER, HI-TEMP
 RIGHT ANGLE, LOW PROFILE, GOLD PLATED

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [MM] TOLERANCES: EXCEPT AS NOTED		INCHES		HOLE SIZES	
.X	± .10	Ø.X	± .10		
.XX	± .020	Ø.XXX	± .015		
.XXX	± .015	Ø.XXX	± .010		
APPROVALS		DATE			
DRAWN	AY	1/11/11			
CHECKED	JL	1/11/11			
APPROVED					
SIZE	PART NO.	TITLE		REV.	
X	PH1RB-XX-U-.157/.157/.014-HT	.100 [2.54] SINGLE ROW PIN HEADER, HI-TEMP RIGHT ANGLE, LOW PROFILE, GOLD PLATED		-	
REF:	S00039T	SCALE:	NIS	SHEET	1 OF 1