

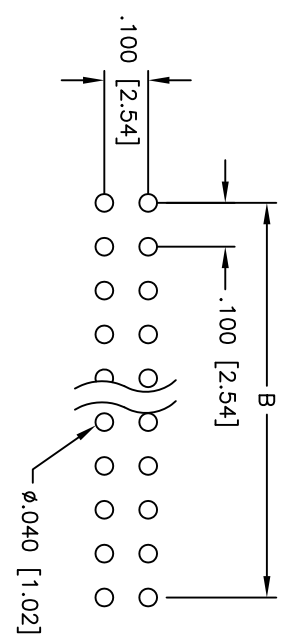
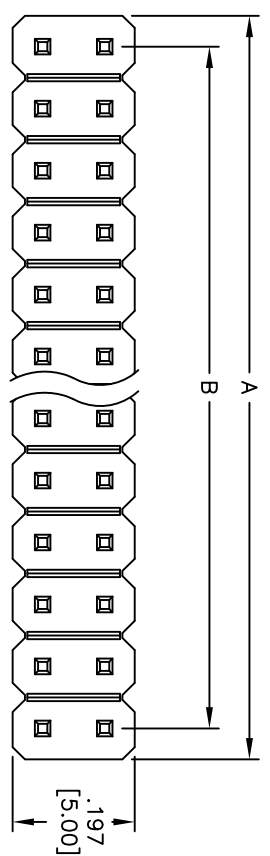


Rev	AWO #	Description	Date	Appr
-		RELEASED	7/23/10	

APPROVED: _____
 DATE: _____ TITLE: _____



RECOMMENDED PCB LAYOUT

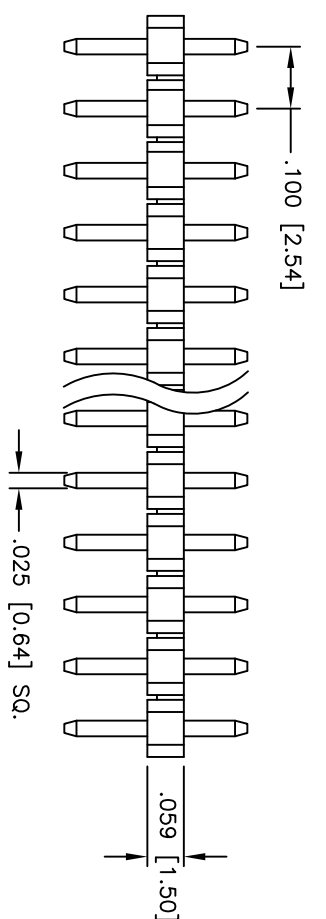

SPECIFICATIONS:

Material:

Insulator: Hi-temp thermoplastic, glass reinforced, rated UL 94V-0

Insulator color: Black

Contacts: Brass

Plating: Tin over Copper underplate overall

Electrical:

Current rating: 3 Amps max

Contact resistance: 20 mohms max

Dielectric withstanding voltage: 1,000 Mohms min

Temperature Rating: 500 VAC for 1 minute

Operating temperature: -40°C to +105°C

Environmental: Lead free, RoHS compliant

Recommended soldering temp: 260°C for 5 seconds



Positions: 4 thru 80
 A = .100 [2.54] x No. of Positions per Row
 B = .100 [2.54] x No. of Spaces

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE IN INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES HOLE SIZE
 .X ± .10 ØXX ± .10
 .XX ± .020 ØXXX ± .015
 .XXX ± .015 ØXXXX ± .010

ADAM TECH

909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .100 [2.54] DUAL ROW PIN HEADER
 TIN PLATED, 1.5mm INSULATOR, HI-TEMP

APPROVALS	DATE
DRAWN AY	7/23/10
CHECKED AH	7/23/10
APPROVED	

SIZE	PART NO.	REV.
X	PH2-XX-T-.091/.335-L-HT	-
REF: S00069T	SCALE: NTS	SHEET 1 OF 1