
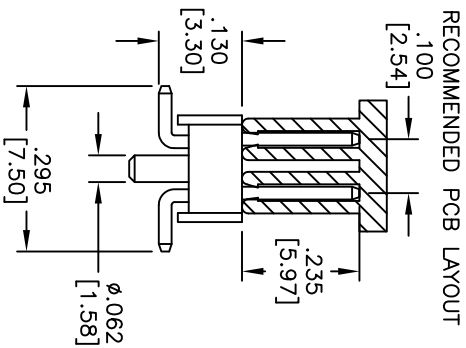
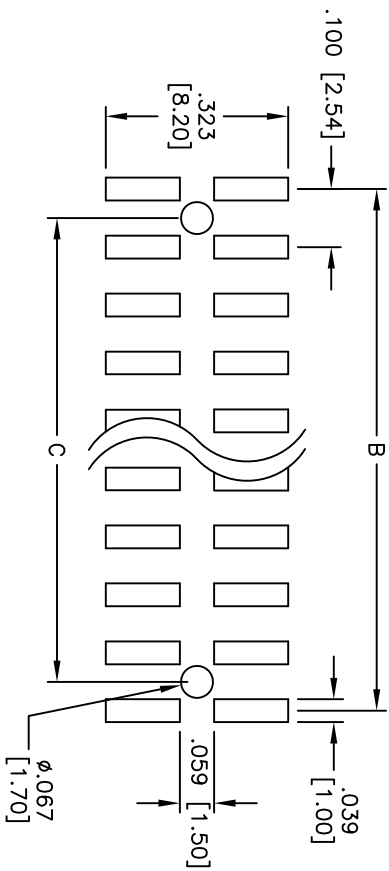
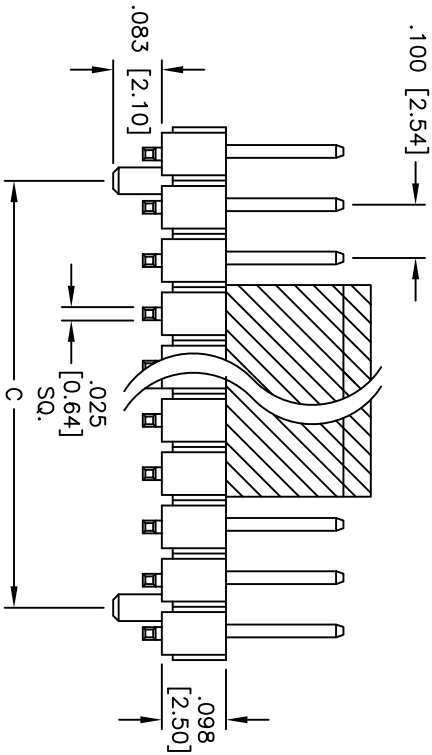


Rev	AWO #	Description	Date	Appr
-		RELEASED	8/23/10	

APPROVED: _____
 DATE: _____ TITLE: _____

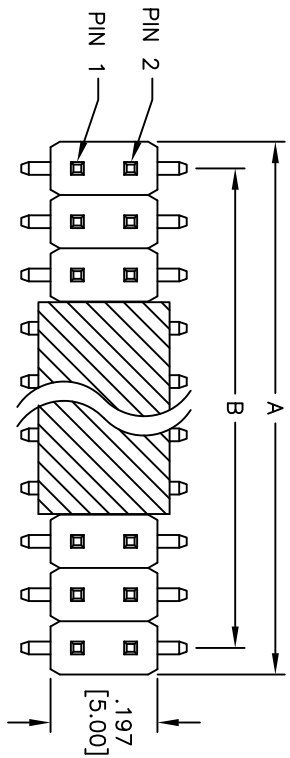

Positions: 2 thru 80
 A = .100 [2.54] x No. of Positions per Row
 B = .100 [2.54] x No. of Spaces
 C = .100 [2.54] x No. of Spaces - .100 [2.54]

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE IN INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES HOLE SIZES

.X	± .10	ØXX	± .10
.XX	± .020	ØXXX	± .015
.XXX	± .015	ØXXXX	± .010
APPROVALS	DATE		

DRAWN	DY	8/23/10
CHECKED		
APPROVED		

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .100 [2.54] DUAL ROW PIN HEADER, SMT
 TIN PLATED, PLASTIC TUBE PACKAGING

SIZE	PART NO.	REV.
X	PH2-XX-TA-SMT-P-PP-PT	-
REF:	S00039T	SHEET 1 OF 1

SPECIFICATIONS:

Material: Hi-temp thermoplastic, rated UL 94V-0
 Insulator color: Black
 Contacts: Brass

Plating: Tin over Copper underplate overall.

Electrical: Current rating: 3 Amp max

Contact resistance: 20 mohms max

Insulation resistance: 5,000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating: Operating temperature: -55°C to +105°C

Environmental: Lead free, RoHS compliant

Recommended soldering temp: 260°C for 5 seconds



6

5

4

3

2

1