

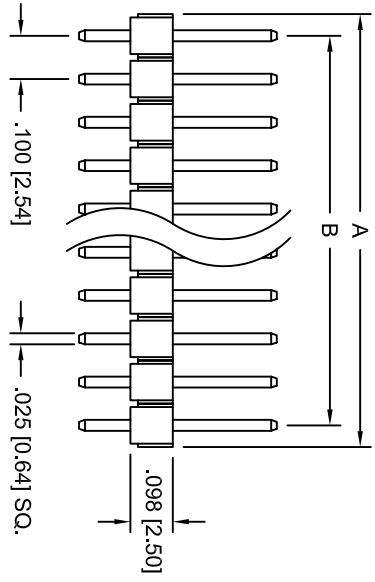
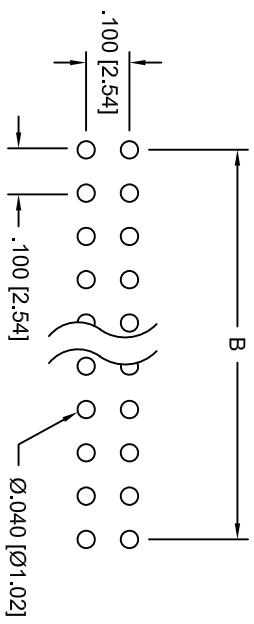


Rev	AWO #	Description	Date	Appr
-		RELEASED	9/11/08	

APPROVED: _____
 DATE: _____ TITLE: _____

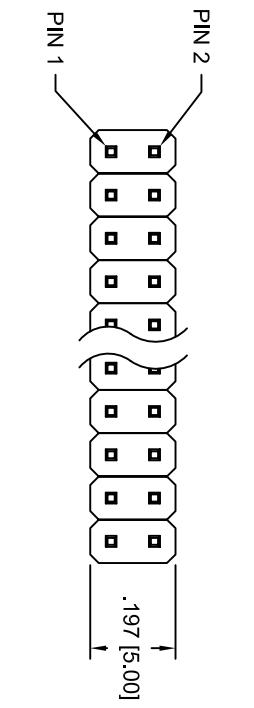

A = .100 [2.54] X No. of Positions.
 B = .100 [2.54] X No. of Spaces.

SPECIFICATIONS:

- Material:**
 Insulator: Nylon 6T, rated UL 94V-0
 Insulator color: Black
 Contacts: Brass
 Plating:
 Tin over Copper underplate overall
- Electrical:**
 Operating voltage: 250 VAC max
 Current rating: 3 Amps max
 Contact resistance: 20 mohms max. Initial
 Insulation resistance: 5000 Mohms min @ 500 VDC
 Dielectric withstanding voltage: 1000 VAC for 1 minute
 Temperature Rating:
 Operating temperature: -55°C to +105°C
- Environmental:**
 Lead free, RoHS compliant.
 Recommended soldering temp: 260°C for 5 sec.

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES ARE NOTED	
INCHES	HOLDS
.X ± .10	ØXX ± .10
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXXX ± .010
APPROVALS	DATE
DRAWN	SS
CHECKED	
APPROVED	

ADAM TECH	
909 Rahway Avenue, Union, NJ 07083	
Phone: 908-687-5000 Fax: 908-687-5710	
TITLE: DUAL ROW PIN HEADER, .100" [2.54mm]	
PITCH, TIN PLATED, 2 TO 80 PINS	
SIZE	PART NO.
X	PH2-XX-TB-HT
SCALE: NTS	SHEET 1 OF 1

