

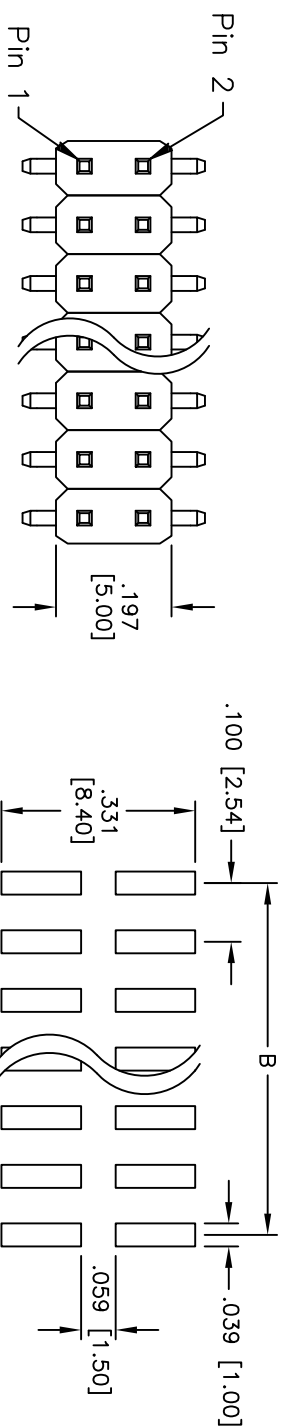


Rev	AWO #	Description	Date	Appr
-		RELEASED	6/10/11	

APPROVED: _____
 DATE: _____ TITLE: _____

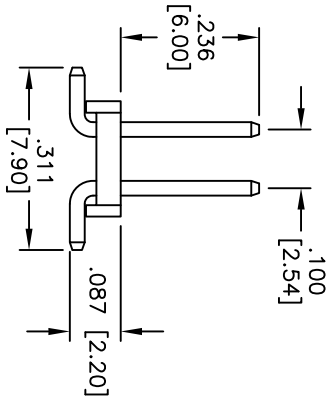

RECOMMENDED PCB LAYOUT

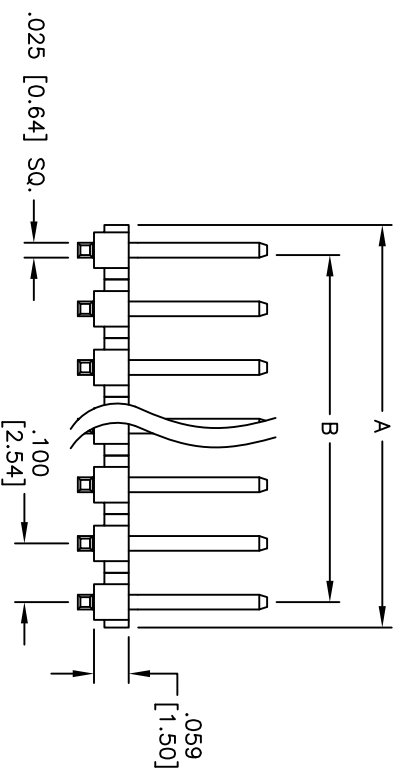

Positions: 2 thru 80
 A = .100 [2.54] x No. of Positions per Row
 B = .100 [2.54] x No. of Spaces

SPECIFICATIONS:
 Material: Insulator: Hi-temp thermoplastic, rated UL 94V-0
 Insulator color: Black
 Contacts: Brass
 Plating: Gold flash over Nickel underplate overall
 Electrical: Current rating: 3 Amps max
 Contact resistance: 20 mohms max @ DC 100mA
 Insulation resistance: 5,000 Mohms min @ DC 500V
 Dielectric voltage: AC 500V for 1 minute
 Environmental: Lead free, RoHS compliant
 Recommended soldering temp: 260°C for 5 seconds

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .100 [2.54] DUAL ROW PIN HEADER
 SURFACE MOUNT, GOLD PLATED

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES ARE NOTED		DRAWN: DY		DATE: 6/10/11	
INCHES: .X ± .10 .XX ± .020 .XXX ± .015		HOLDS: ØX ± .10 ØXX ± .015 ØXXX ± .010		APPROVALS:	
CHECKED	APPROVED	SIZE: X	PART NO.: PH2-XX-UA-SMT-L	REV: -	REV: -
APPROVED		REF: S00039T	SCALE: NTS	SHEET 1 OF 1	

