

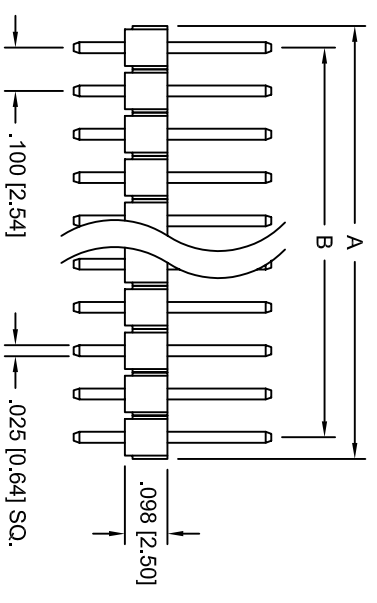


Rev	AWO #	Description	Date	Appr
-		RELEASED	9/20/04	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

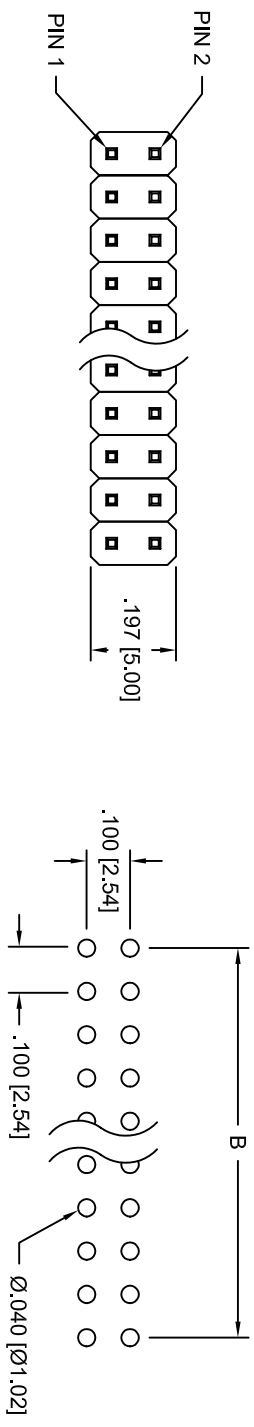

A = .100 [2.54] X No. of Positions.  
 B = .100 [2.54] X No. of Spaces.

**SPECIFICATIONS:**

- Material: Insulator: PBT, rated UL 94V-0
- Insulator color: Black
- Contacts: Brass
- Plating: 15u" Gold over Nickel underplate on mating area, Tin over Copper underplate on solder tails
- Electrical: Operating voltage: 250 VAC max
- Current rating: 3 Amps max
- Insulation resistance: 5000 Mohms min @ 500 VDC
- Dielectric withstanding voltage: 1000 VAC for 1 minute
- Temperature Rating: Operating temperature: -55°C to +105°C

**ADAM TECH**

909 Rahway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: DUAL ROW PIN HEADER, .100" [2.54mm] PITCH, SEL GOLD PLATED, 4 TO 80 PINS

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN SS	9/20/04
CHECKED	
APPROVED	

SIZE X	PART NO. PH2-XX-VA	REV. -
REF:	SCALE: NTS	SHEET 1 OF 1