
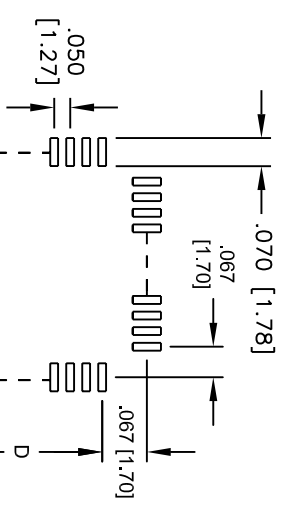


Rev	AWO #	Description	Date	Appr
-		RELEASED	12/9/04	


6 5 4 3 2 1

APPROVED: _____

DATE: _____ TITLE: _____

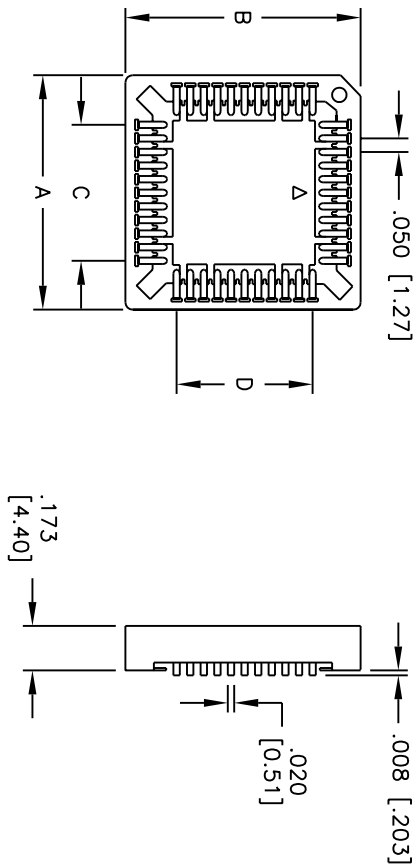

POSITIONS	A	B	C	D
20	.616 [15.65]	.616 [15.65]	.200 [5.08]	.200 [5.08]
28	.715 [18.16]	.715 [18.16]	.300 [7.62]	.300 [7.62]
32	.715 [18.16]	.817 [20.75]	.300 [7.62]	.400 [10.16]
44	.917 [23.28]	.917 [23.28]	.500 [12.70]	.500 [12.70]
52	1.017 [25.84]	1.017 [25.84]	.600 [15.24]	.600 [15.24]
68	1.219 [30.95]	1.219 [30.95]	.800 [20.32]	.800 [20.32]
84	1.417 [36.00]	1.417 [36.00]	1.000 [25.40]	1.000 [25.40]



RECOMMENDED
PCB LAYOUT

SPECIFICATIONS:

Material:

Insulator: PPS, Glass reinforced, rated UL 94V-0

Insulator color: Brown

Contacts: Phosphor Bronze

Plating:

Gold Flash over Nickel underplate overall

Electrical:

Operating voltage: 250 VAC max

Current rating: 1 Amp max

Contact resistance: 30 mohms max initial

Insulation resistance: 1000 Mohms min

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:

Operating temperature: -55°C to +105°C

Max Process Temperature:

230°C for 30 seconds

260°C for 5 seconds

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE INCHES [MM]
TOLERANCES: EXCEPT AS NOTED
INCHES
.X ± .10 ØXX ± .10
.XX ± .020 ØXXX ± .015
.XXX ± .015 ØXXXX ± .010

ADAM TECH
909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

DRAWN	SS	12/9/04
CHECKED		
APPROVED		

TITLE	PLCC SOCKET, SURFACE MOUNT, GOLD PLATED
SIZE	PLCC-XX-AG-SMT
PART NO.	
SCALE:	NTS
SHEET	1 OF 1

6 5 4 3 2 1

A

A

B

B

C

C

D

D