
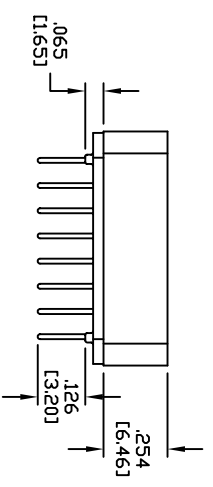
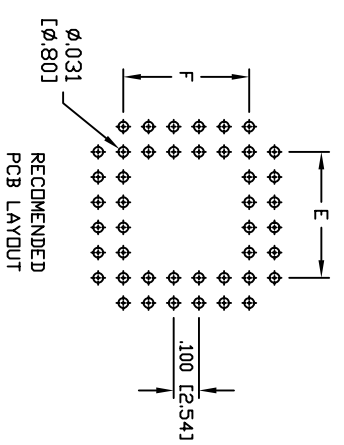
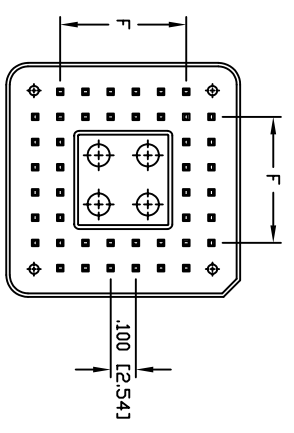


Rev	AWO #	Description	Date	Appr
-		RELEASED	12/6/05	

APPROVED: \_\_\_\_\_  
 DATE: \_\_\_\_\_ TITLE: \_\_\_\_\_

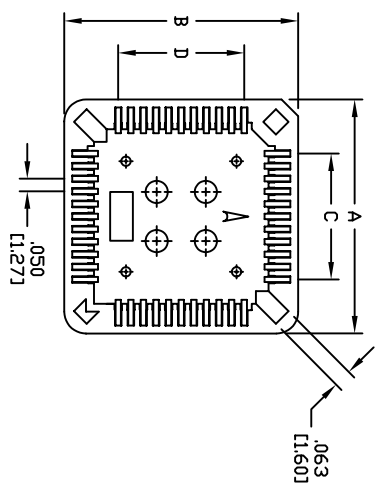

POSITIONS	A	B	C	D	E	F
20	0.610 [15.15]	0.610 [15.15]	0.200 [5.08]	0.200 [5.08]	0.200 [5.08]	0.200 [5.08]
28	0.710 [18.04]	0.710 [18.04]	0.300 [7.62]	0.300 [7.62]	0.300 [7.62]	0.300 [7.62]
32	0.710 [18.04]	0.811 [20.60]	0.300 [7.62]	0.400 [10.16]	0.300 [7.62]	0.400 [10.16]
44	0.925 [23.48]	0.925 [23.48]	0.500 [12.70]	0.500 [12.70]	0.500 [12.70]	0.500 [12.70]
52	1.018 [25.88]	1.018 [25.88]	0.600 [15.24]	0.600 [15.24]	0.600 [15.24]	0.600 [15.24]
68	1.245 [31.66]	1.245 [31.66]	0.800 [20.32]	0.800 [20.32]	0.800 [20.32]	0.800 [20.32]
84	1.445 [36.66]	1.445 [36.66]	1.000 [25.40]	1.000 [25.40]	1.000 [25.40]	1.000 [25.40]

**SPECIFICATIONS:**

**Material:**  
 Insulator: PBT, glass reinforced, rated UL 94V-0  
 Insulator color: Black  
 Contacts: Phosphor Bronze  
 Plating:  
 Tin over Copper underplate overall

**Electrical:**  
 Operating voltage: 250 VAC max  
 Current rating: 1 Amp max  
 Contact resistance: 30 mohms max  
 Insulation resistance: 1000 Mohms min  
 Dielectric withstanding voltage: 500 VAC for 1 minute

**Temperature Rating:**  
 Operating temperature: -55°C to +105°C

**Environmental:**  
 Lead free, RoHS compliant.  
 Recommended soldering temp: 235 for 5 sec.

**ADAM TECH**

909 Railway Avenue, Union, NJ 07083  
 Phone: 908-687-5000 Fax: 908-687-5710

PLCC SOCKET, 20 ~ 84 POSITION, PCB WITH PEG

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE IN INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN	SS
CHECKED	
APPROVED	

SIZE	PART NO.	PLCC-XX-AT-A	REV.
X			-
REF:	SCALE:	NTS	SHEET 1 OF 1