

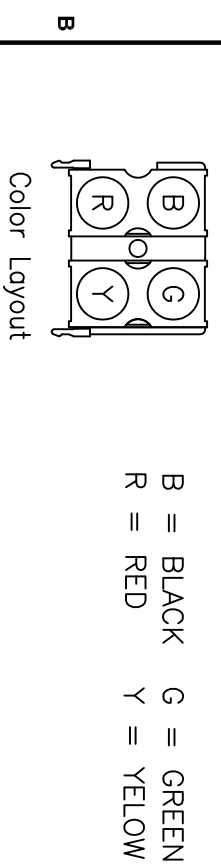


Rev	AWO #	Description	Date	Appr
-		RELEASED	12/10/04	

6 | 5 | 4 | 3 | 2 | 1

APPROVED: _____
 DATE: _____ TITLE: _____

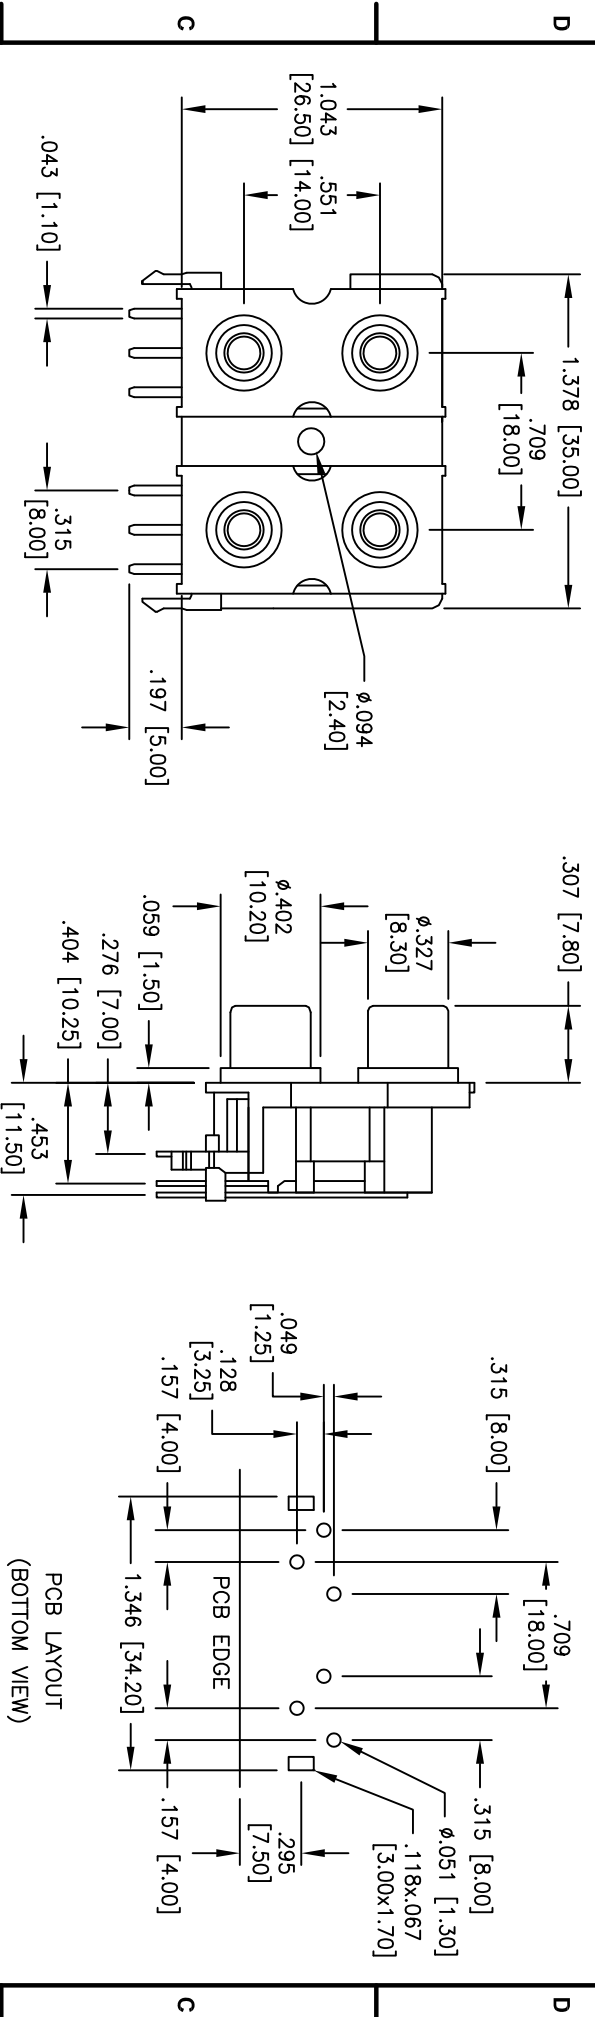

SPECIFICATIONS:

Material:
 Insulator: PBT, Glass reinforced, rated UL 94V-0
 Insulator colors: Black, Red, Green, Yellow
 Bushing: Brass, Nickel plated
 Contacts: Brass
 Plating:
 Tin or Silver over Copper underplate

Electrical:
 Operating voltage: 12 VDC max.
 Current rating: 1 Amp max.
 Contact resistance: 30 Mohms max. initial
 Insulation resistance: 100 Mohms min.
 Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature Rating:
 Operating temperature: -25°C to +85°C
 Environmental:
 Lead free, RoHS compliant.
 Recommended soldering temp: 235°C for 5 sec.

A

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

RCA JACK, 4 PORTS, 2 X 2

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
X .10	ϕ X \pm .10
.XX \pm .020	ϕ XX \pm .015
.XXX \pm .015	ϕ XXX \pm .010
APPROVALS	DATE
DRAWN SS	10/4/04
CHECKED	
APPROVED	

SIZE	PART NO.	REV.
X	RCA-104-B/R/G/Y	-
REF:	SCALE: NTS	SHEET 1 OF 1

A

6 | 5 | 4 | 3 | 2 | 1