

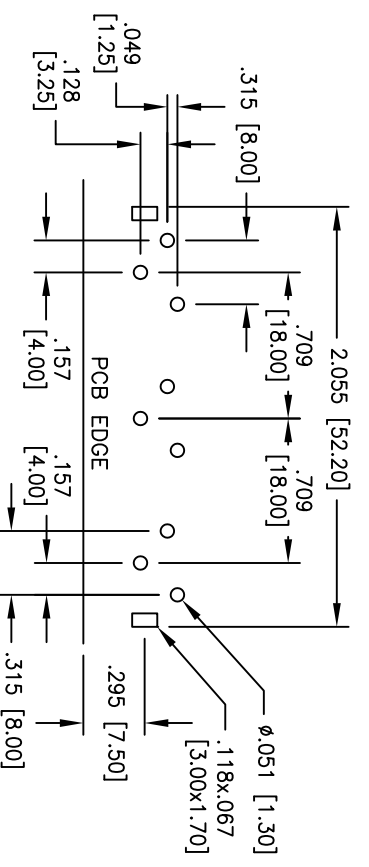
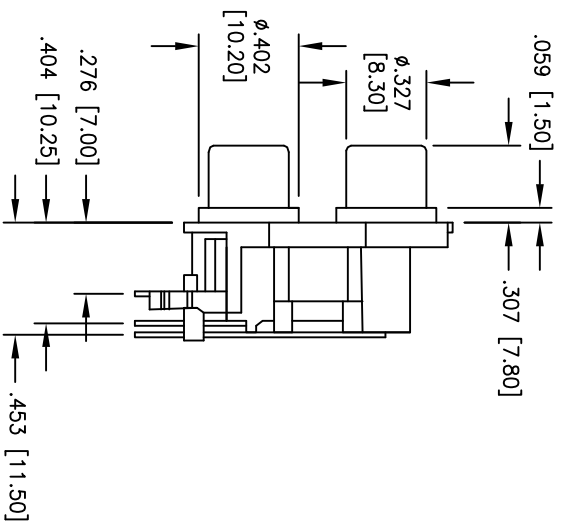



Rev	AWO #	Description	Date	Appr
-		RELEASED	10/21/09	

APPROVED: _____
 DATE: _____ TITLE: _____

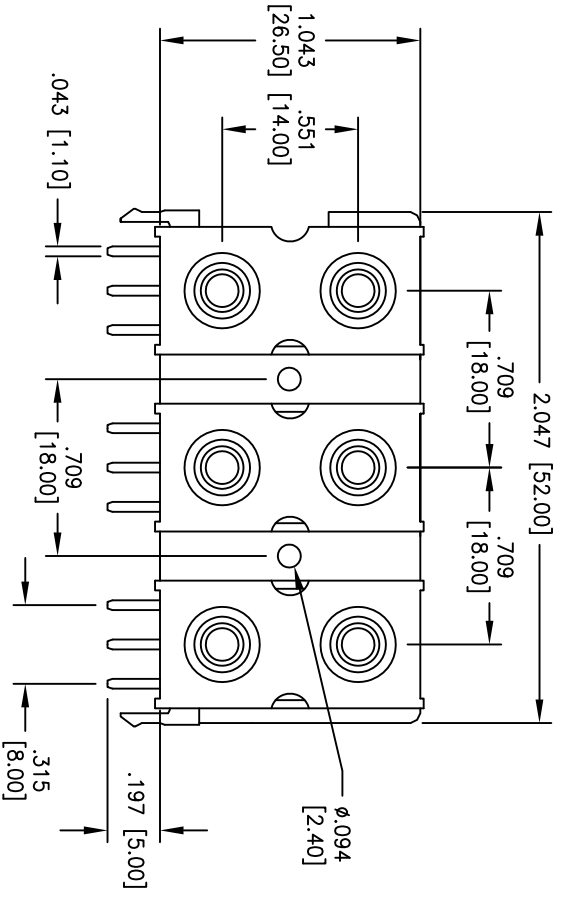

B = BLACK
 R = RED
 G = GREEN
 Y = YELLOW
 W = WHITE

Color Layout

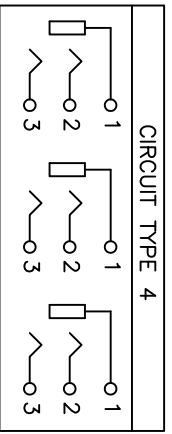

CIRCUIT TYPE 4

SPECIFICATIONS:

- Material: Insulator: PBT, Glass reinforced, rated UL 94V-0
- Insulator color: Black
- Inserts: PBT, Color Black, Red, Green, Yellow, White
- Bushing: Brass, Nickel plated
- Contacts: Brass
- Plating: Tin or Silver over Copper underplate

- Electrical: Operating voltage: 12 VDC max.
- Current rating: 1 Amp max.
- Contact resistance: 30 mohms max. initial
- Insulation resistance: 100 Mohms min.
- Dielectric withstanding voltage: 500 VAC for 1 minute
- Temperature Rating: Operating temperature: -25°C to +85°C

- Environmental: Environmental: Lead free, RoHS Compliant
- Recommended soldering temp: 235°C for 5 seconds



ADAM TECH

909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

RCA JACK, 6 PORTS, 2 X 3

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ± .10	ØXX ± .015
.XX ± .020	ØXXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN DY	10/21/09
CHECKED	
APPROVED	

SIZE	PART NO.	REV.
X	RCA-114-B/R/G/Y/W/R	-
REF:	SCALE: NTS	SHEET 1 OF 1