
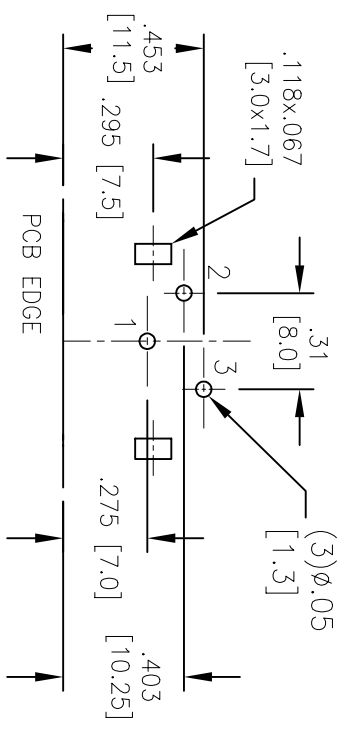



Rev	AWO #	Description	Date	Appr
-		RELEASED	8/6/04	

APPROVED: _____
 DATE: _____ TITLE: _____

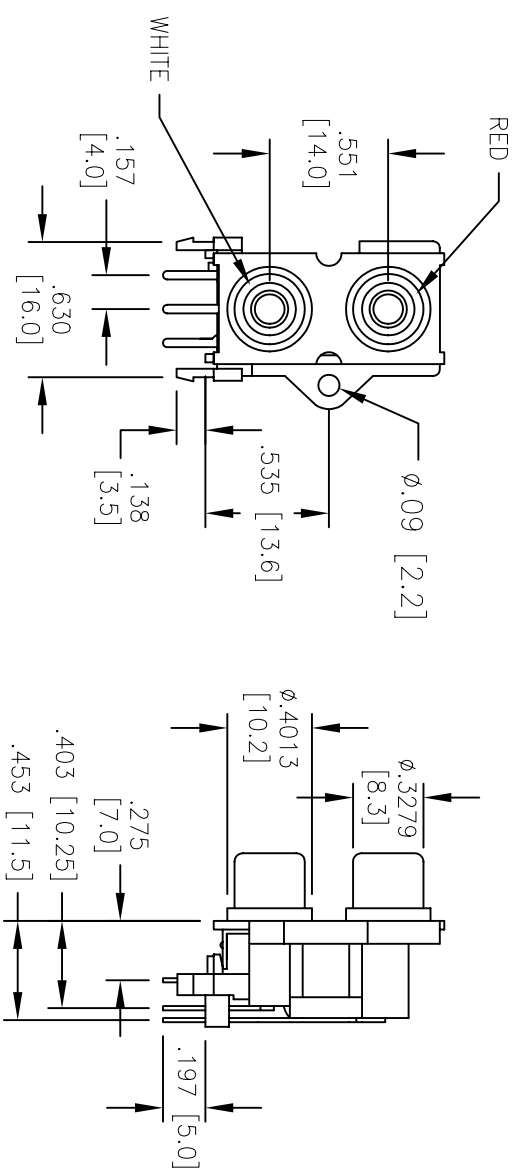

SPECIFICATIONS:

Material:

Insulator: PBT, glass reinforced thermoplastic, rated UL 94V-0

Insulator colors: Red, White, Black & Yellow

Bushing: Brass, Nickel plated

Contacts: Brass

Plating:

Tin or Silver over Copper underplate.

Electrical:

Operation voltage: 12V DC max

Current rating: 1 Amp max

Insulation resistance: 100 Mohms min

Dielectric withstanding voltage: 500 VAC for 1 minute

Temperature rating:

Operating temperature: -25°C to +85°C

Packaging:

Anti-ESD plastic bags

UNLESS OTHERWISE SPECIFIED	
ALL DIMENSIONS ARE INCHES [MM]	
TOLERANCES UNLESS AS NOTED	
INCHES	HOLES
.X ± .10	∅XX ± .10
.XX ± .020	∅XXX ± .015
.XXX ± .015	∅XXXX ± .010
APPROVALS	DATE
DRAWN	SS
CHECKED	
APPROVED	

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: RCA JACK, RIGHT ANGLE, 2 PORT,
 PCB MOUNT TOP RED / BOTTOM WHITE

SIZE: X PART NO.: RCA-8-4-RW

Operating temperature: -25°C to +85°C

Anti-ESD plastic bags

SCALE: NTS	SHEET 1 OF 1
------------	--------------

REV: -	REV: -
--------	--------