


Rev	AWO #	Description	Date	Appr
-	8719	RELEASED	5/7/08	

APPROVED: _____
 DATE: _____ TITLE: _____

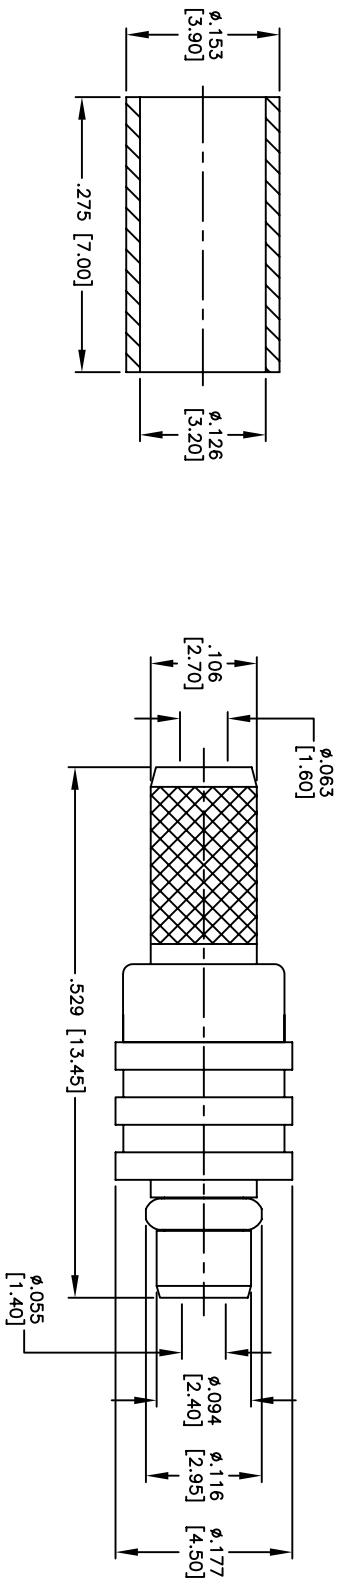

QTY	DESCRIPTION	MATERIAL	FINISH
1	FERRULE	BRASS	GOLD
1	PIN	BRASS	GOLD
1	BARREL	BRASS	GOLD
1	BODY	BRASS	GOLD
1	INSULATOR	TEFLON	NONE
1	SPRING	Be Cu	GOLD

SPECIFICATIONS:

Electrical:
 Operating voltage: 170 VAC max
 Current rating: 1.3 Amps max
 Contact resistance: 5 Milliohms max
 Insulation resistance: 1000 Mohms min
 Impedance: 50 ohm
 Frequency Range: 0-6 GHz
 Dielectric withstanding voltage: 500 VAC for 1 minute
Temperature Rating:
 Operating temperature: -65°C to +125°C
 Environmental:
 Lead free, RoHS compliant.



ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-0214

TITLE: RF CONNECTOR, TYPE MMCKX,
 MALE CRIMP FOR RG174, 50 OHM

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE MM [INCHES] TOLERANCES: EXCEPT AS NOTED		DRAWN: SS		DATE: 5/7/08	
INCHES: .X ± .10 .XX ± .020 .XXX ± .015		HOLE: ØX ± .10 ØXXX ± .015		APPROVALS:	
CHECKED	APPROVED	SIZE: X	PART NO.: RF12-06-T-02-50-G	SCALE: NTS	SHEET 1 OF 1

6 5 4 3 2 1