

Rev	AWO #	Description	Date	Appr
-		RELEASED	7/29/10	

6

5

4




3

2

1

APPROVED: _____

DATE: _____ TITLE: _____

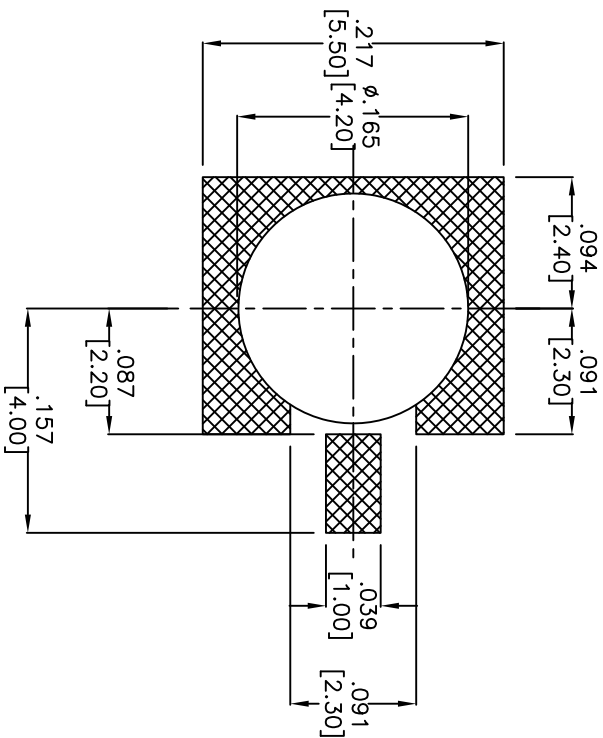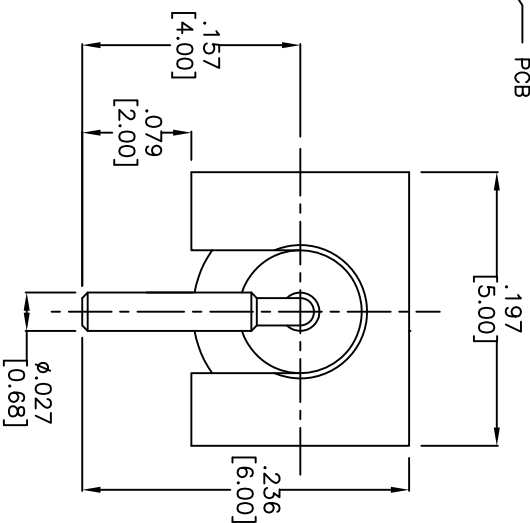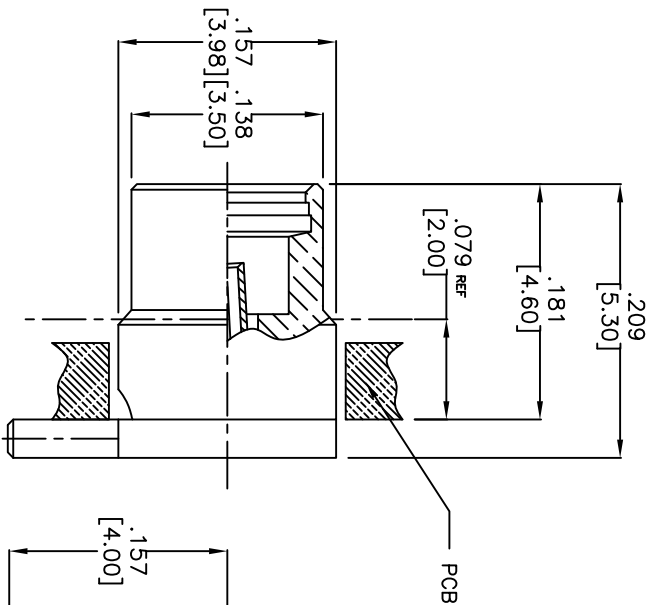

CONTACT PIN	COPPER	30u" GOLD PLATED
INSULATOR	TEFLON	WHITE
BODY	BRASS	GOLD FLASH PLATED
DESCRIPTION	MATERIAL	FINISH

SPECIFICATIONS:**Electrical:**

Nominal Impedance: 50 ohms

Frequency range: 0-6 GHz

Working Voltage: 170 VRMS max.

Dielectric Withstanding Voltage: 500 VRMS min.

Contact Resistance: 5 Milliohms max. (Center Contact)

Contact Resistance: 2.5 Milliohms max. (Outer Contact)

Insulator Resistance: 1000 Megohms min.

Environmental:

Lead free, RoHS compliant.

**ADAM TECH**909 Rahway Avenue, Union, NJ 07083
Phone: 908-687-5000 Fax: 908-687-5710

MMCX JACK R/A PCB MOUNT JACK

UNLESS OTHERWISE SPECIFIED
ALL DIMENSIONS ARE MM
TOLERANCES: EXCEPT AS NOTED
INCHES

.X	± .10	Ø.X	± .10
.XX	± .020	Ø.XXX	± .015
.XXX	± .015	Ø.XXX	± .010

APPROVALS

DRAWN AY 7/29/10

CHECKED AH 7/29/10

APPROVED

TITLE

MMCX JACK R/A PCB MOUNT JACK

SIZE

RF12-500-2

PART NO.

RF12-500-2

REF:

S00092T

SCALE:

NFS

SHEET

1 OF 1

REV:

-

6

5

4

3

2

1