
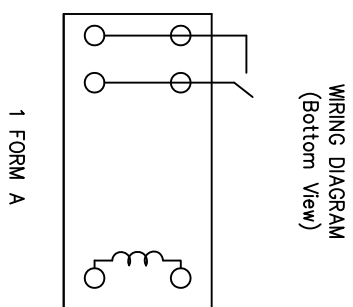
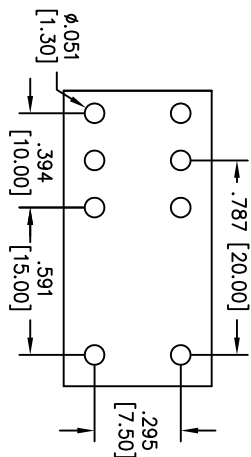


Rev	AWO #	Description	Date	Appr
-		RELEASED	1/07/11	

APPROVED: _____
 DATE: _____ TITLE: _____

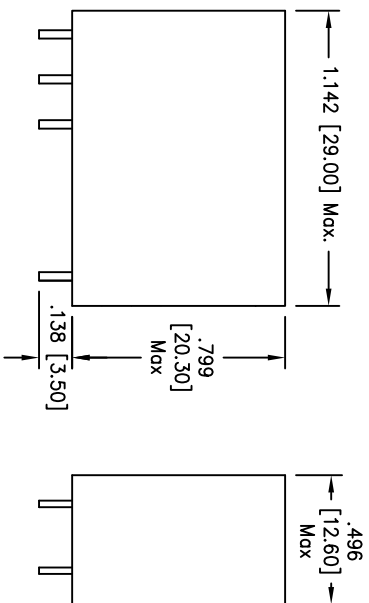

SPECIFICATIONS:
Electrical:
 Contact arrangement: SPST (1FormA)
 Contact material: Silver Alloy
 Switching Voltage: AC250V/DC125V AC
 Contact resistance: 100mΩ max. @ 1A 6VDC
 Insulation resistance: 100MΩ min. @ 500V DC
 Dielectric Strength:
 Between open contact: 1000VAC (50Hz/min)
 Between Coil & Contact: 5000VAC (50Hz/min)
 Operating time: 15ms max. Release time: 8ms max.
 Electrical Life: 100,000
Mechanical:
 Mechanical Life: 10,000,000
 Temperature Rating: Ambient temperature: -30°C to +70°C

PART NO.	RMP-H-1A-P-12
Rated Current (mA)	60mA
Rated Voltage (V DC)	12VDC
Power consumption (W)	0.72W
Maximum voltage	130 Max.
Must Drop-out Voltage	10 Min.
Must Operate Voltage	70 Max.
Coil Resistance	200Ω

Environmental:
 Lead free, RoHS compliant
 Recommended soldering temp: 235°C for 5 sec.
Packaging: Anti-ESD plastic trays
Safety Agency Approvals: cUL Recognized File No. E305638



UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED
 INCHES HOLES
 .X ± .10 ØXX ± .10
 .XX ± .020 ØXXX ± .015
 .XXX ± .015 ØXXXX ± .010

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

APPROVALS	DATE	TITLE
DRAWN DY	1/07/11	POWER RELAY, 12VDC, 1 FORM A, PCB
CHECKED		
APPROVED		

SIZE	PART NO.	SCALE	SHEET	REV.
X	RMP-H-1A-P-12	NIS	1 OF 1	-